


Micro Rail Hold Open Device SA.HO.M

FOR NON-FIRE DOOR APPLICATION


1

Release and remove the endcap, slide shoe and stop block from the micro rail.

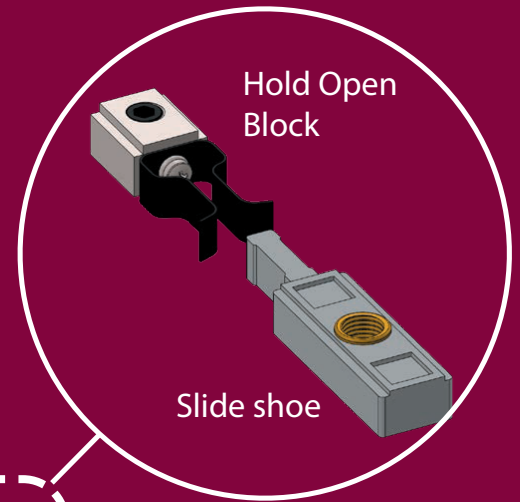

2

Slide the hold open block with clip into the rail, then tighten the screw using an allen key to achieve the desired hold open position.

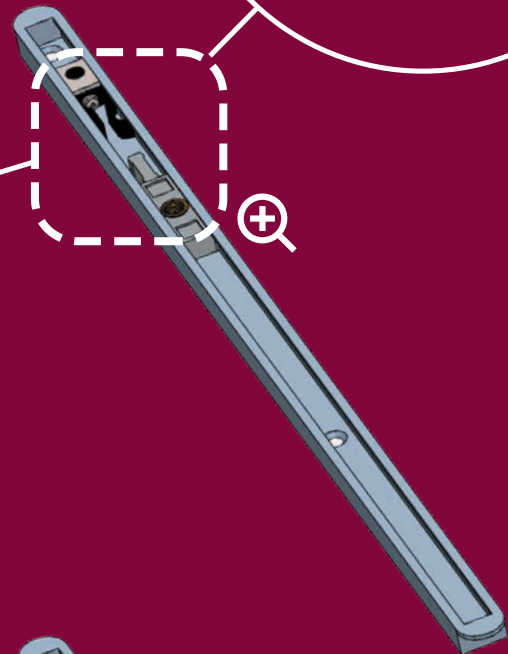

3

Slide in the hold open shoe as shown, and reinsert the endcap.

