




Slide Arm Closer - Push side

TS24




TEL: +44 (0) 1246 261 491 | www.rutlanduk.co.uk





Operations and
Maintenance Manual



BS EN 1154
4 8 2 1 1 3

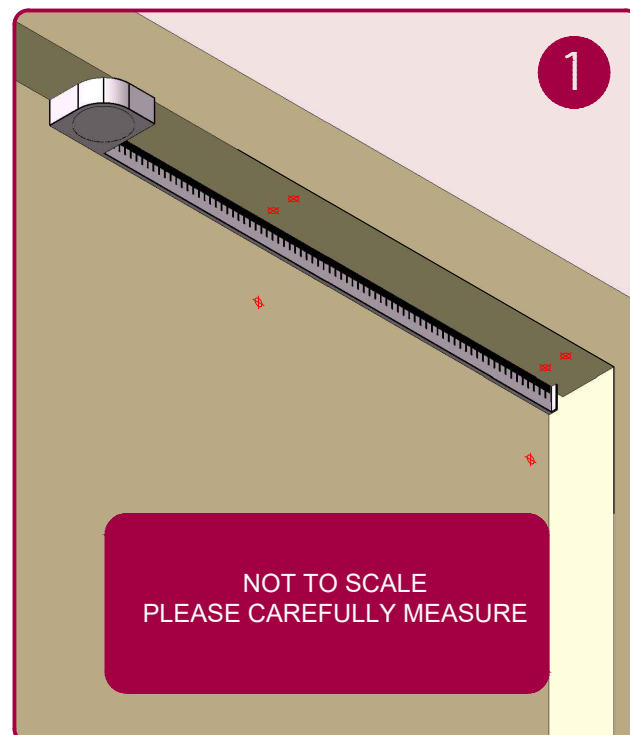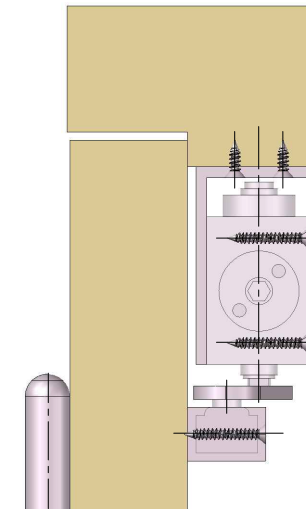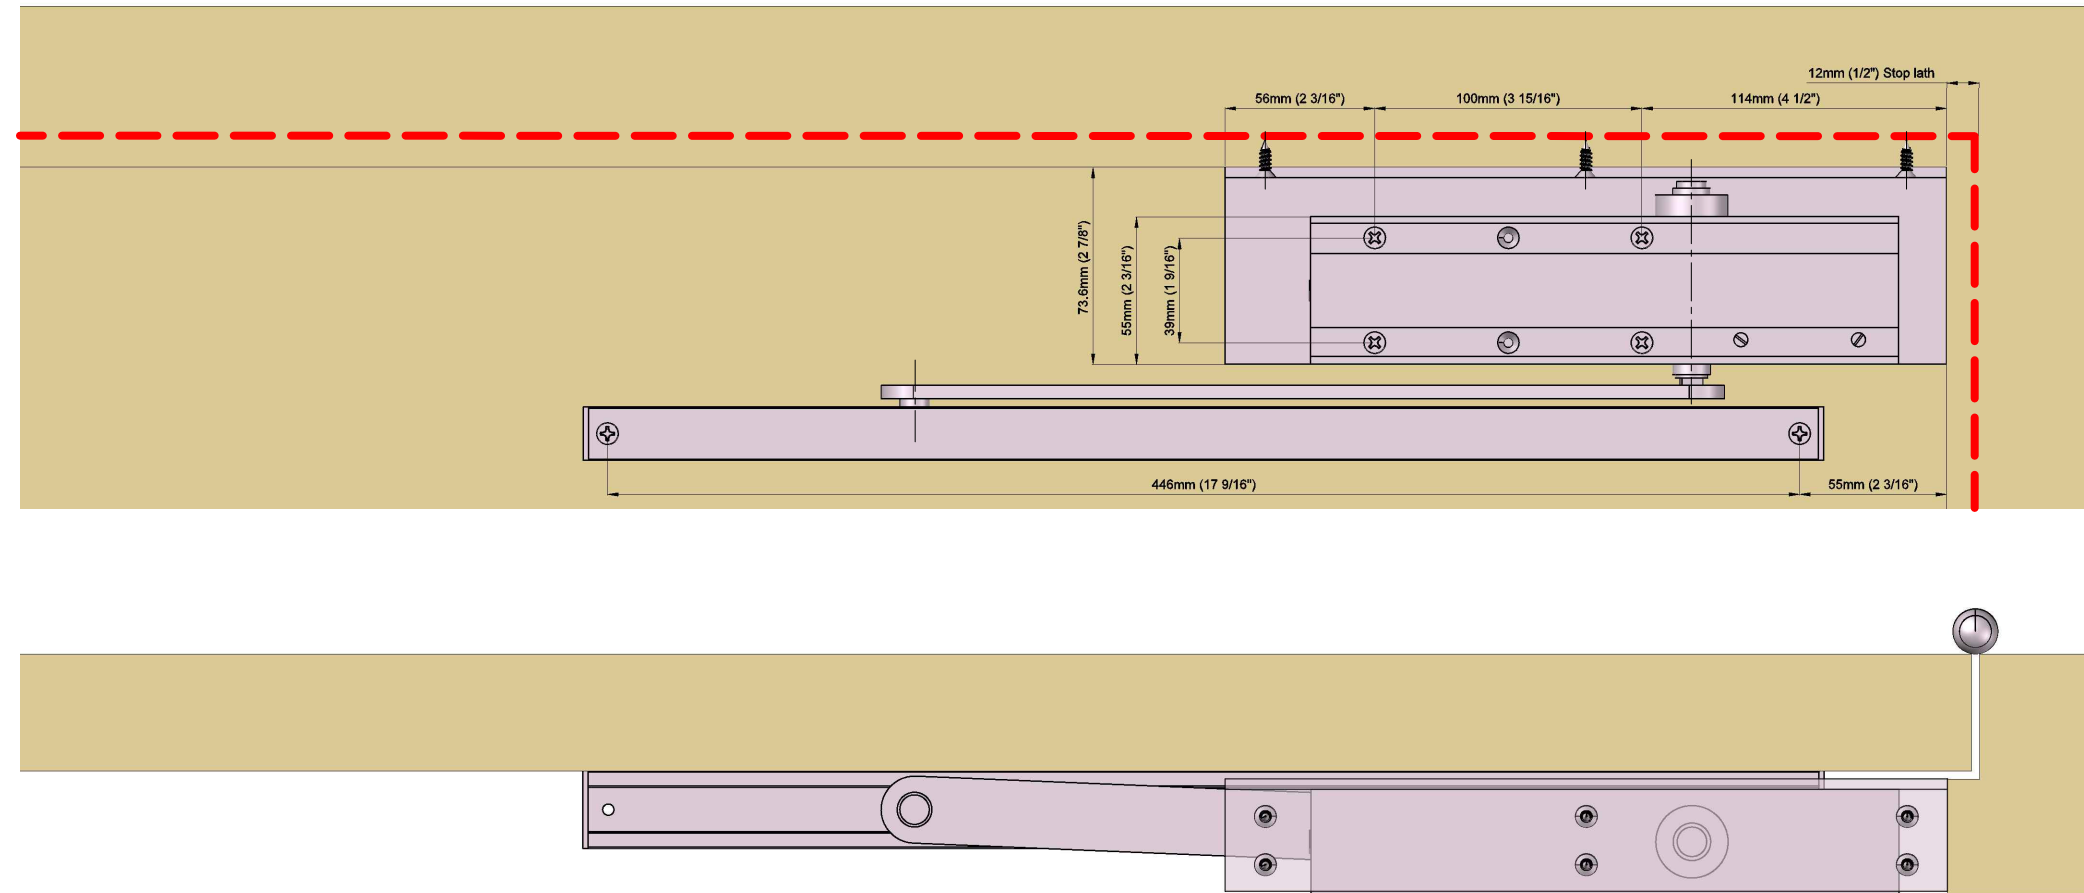

THE PINION BOLT MUST BE TIGHTENED TO 12NM

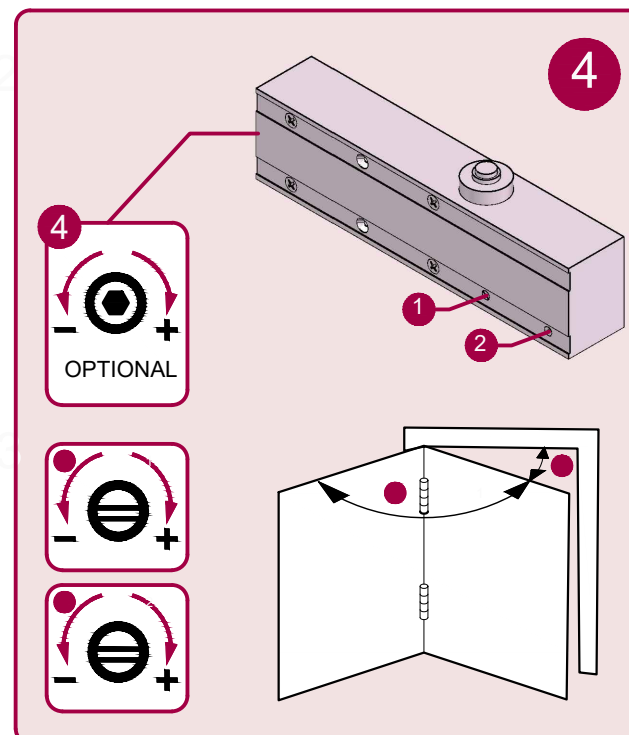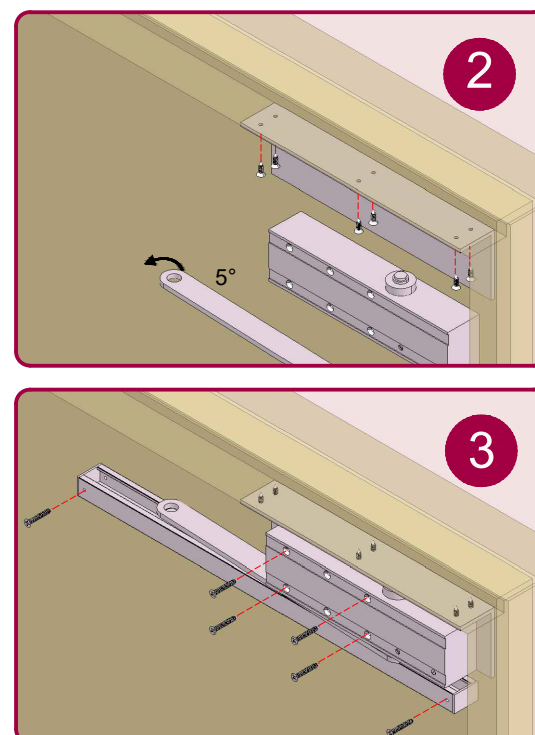

Size 2-4 Power Adjustment				
4				
No. of turns	Size	Max. door width	Max. opening angle	Max weight
-4	2	850mm	120°	45
*0	3	950mm	120°	60
+6	4	1100mm	120°	80
* FACTORY PRE-SET ■ NOT SUITABLE FOR FIRE DOORS				

NO PART OF THIS INSTRUCTION CAN BE COPIED OR STORED IN ANY WAY OR FORM MANUALLY OR ELECTRONICALLY WITHOUT THE FULL PERMISSION OF RUTLAND

COPYRIGHT 2025 ©
Last revision: Aug 2025



Slide Arm Closer - Push side

TS24

TEL: +44 (0) 1246 261 491 | www.rutlanduk.co.uk



Operations and
Maintenance Manual



10
YEARS
WARRANTY






1100mm
Max door width





80Kg
Max door weight

CE UK
1812 1720
BS EN 1154
4 8 2 4 1 1 3

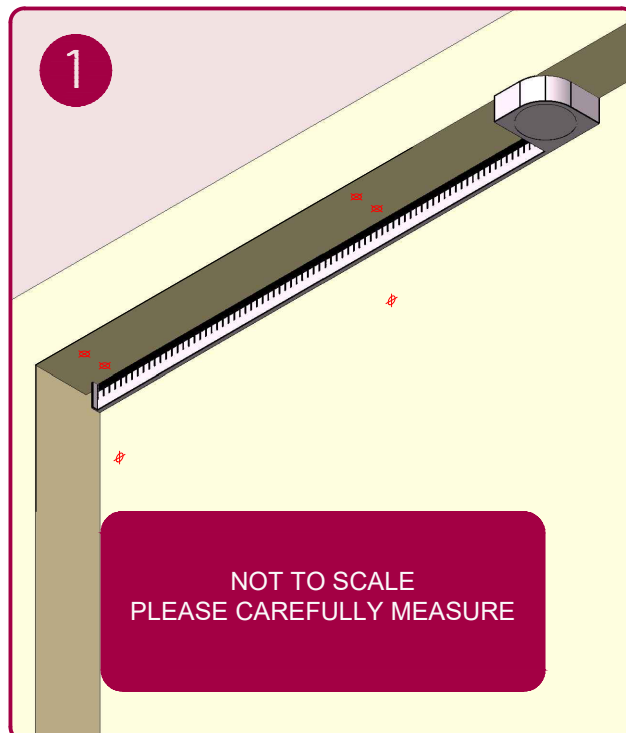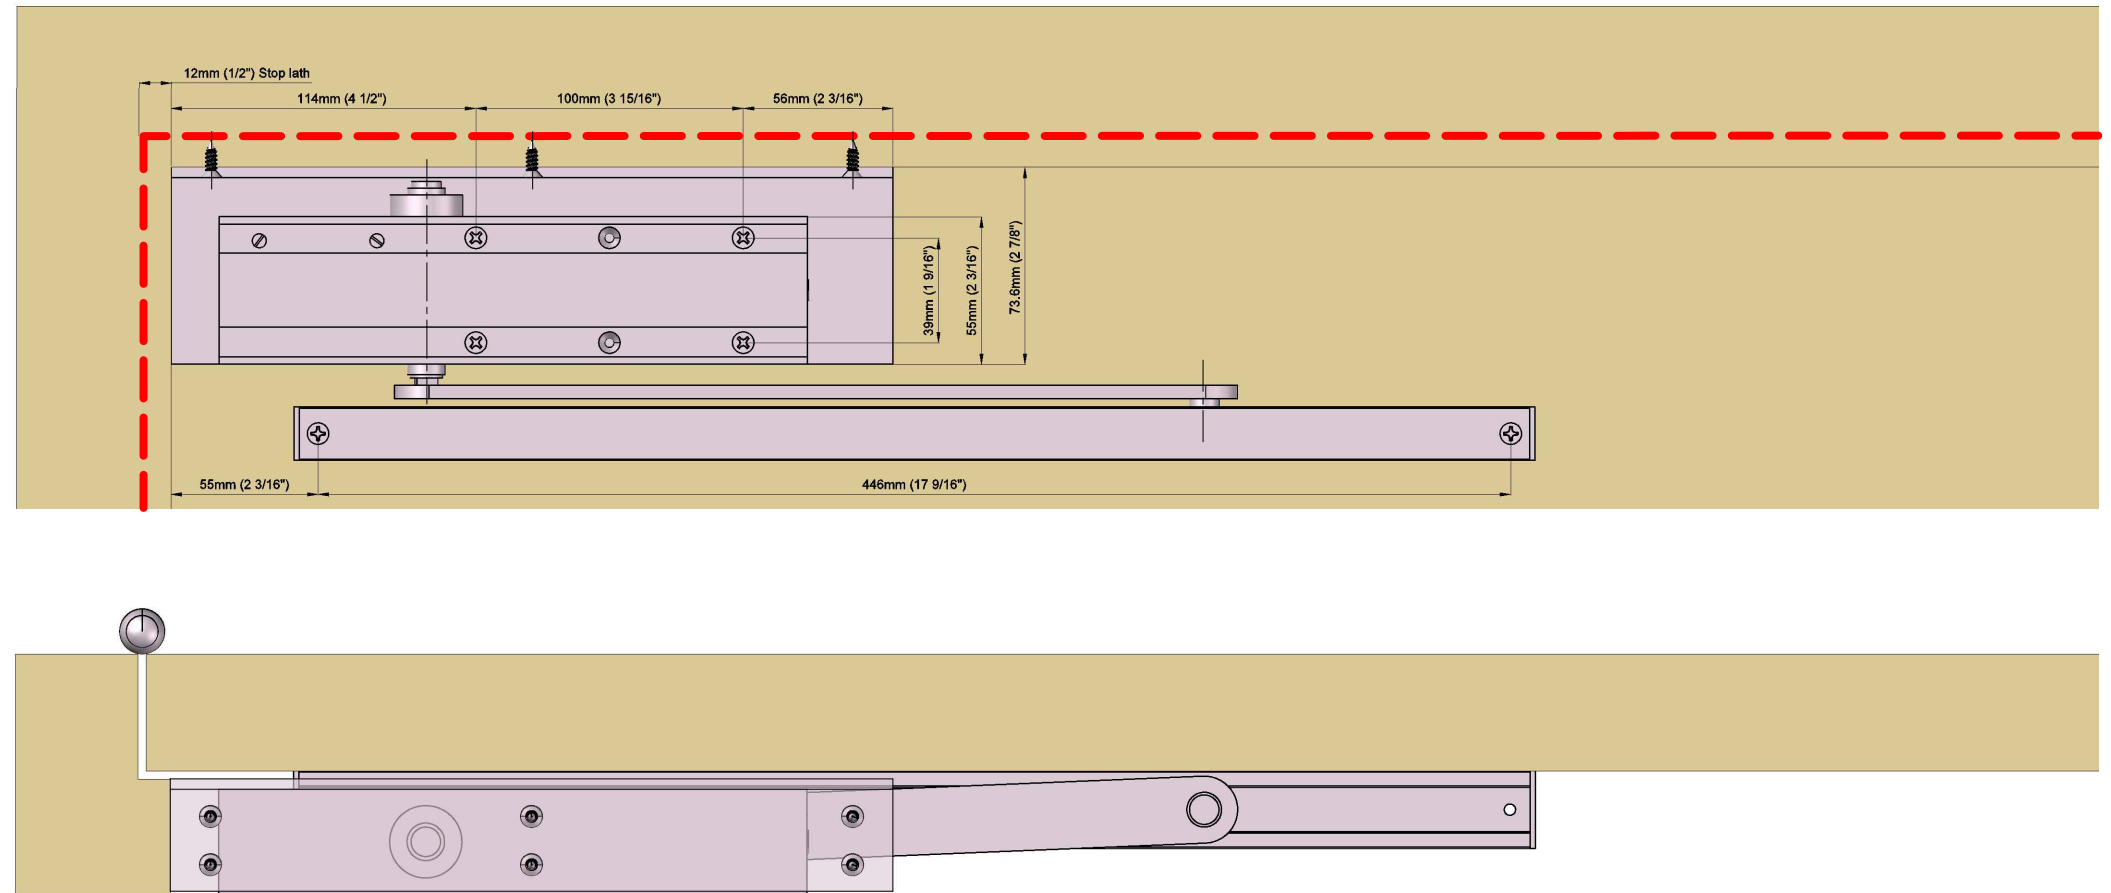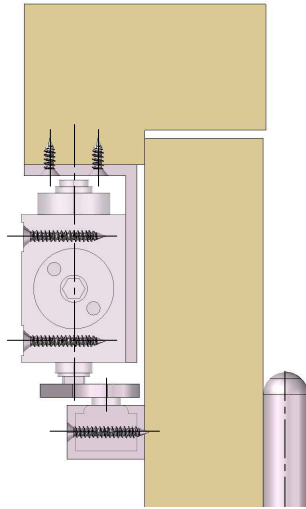

NOT TO SCALE
PLEASE CAREFULLY MEASURE

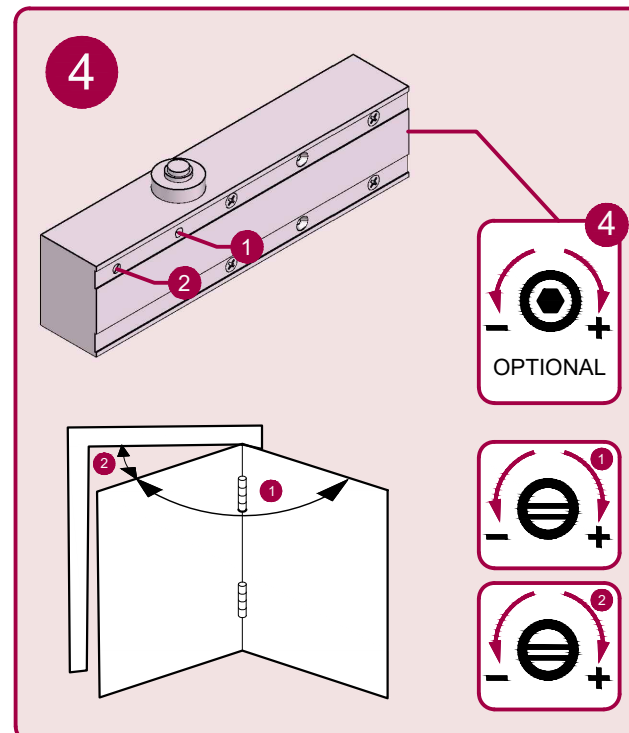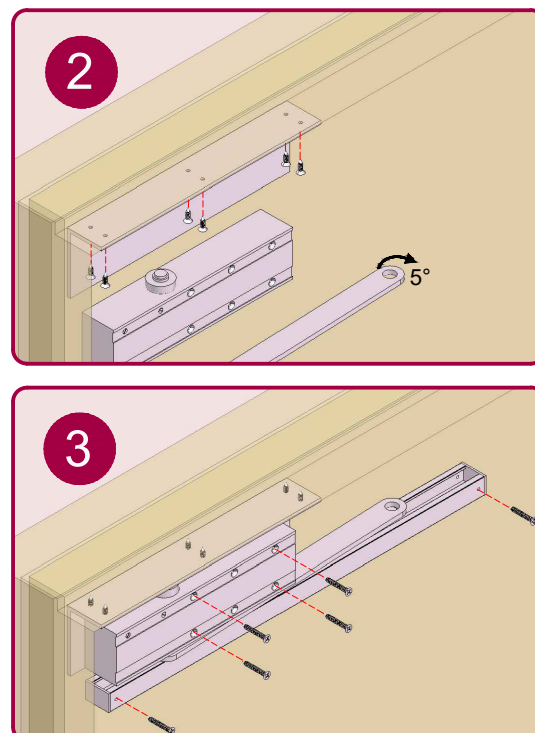

Size 2-4 Power Adjustment				
4				
No. of turns	Size	Max. door width	Max. opening angle	Max weight
-4	2	850mm	120°	45
*0	3	950mm	120°	60
+6	4	1100mm	120°	80
* FACTORY PRE-SET ■ NOT SUITABLE FOR FIRE DOORS				

THE PINION BOLT MUST BE TIGHTENED TO 12NM

NO PART OF THIS INSTRUCTION CAN BE COPIED OR STORED IN ANY WAY OR FORM MANUALLY OR ELECTRONICALLY WITHOUT THE FULL PERMISSION OF RUTLAND

COPYRIGHT 2025 ©
Last revision: Aug 2025