



# Slide Arm Closer - Transom TS24

TEL: +44 (0) 1246 261 491 | [www.rutlanduk.co.uk](http://www.rutlanduk.co.uk)



Operations and  
Maintenance Manual



10  
YEARS  
WARRANTY



1100mm  
Max door width



80Kg  
Max door weight








1812  
BS EN 1154



1720



6156

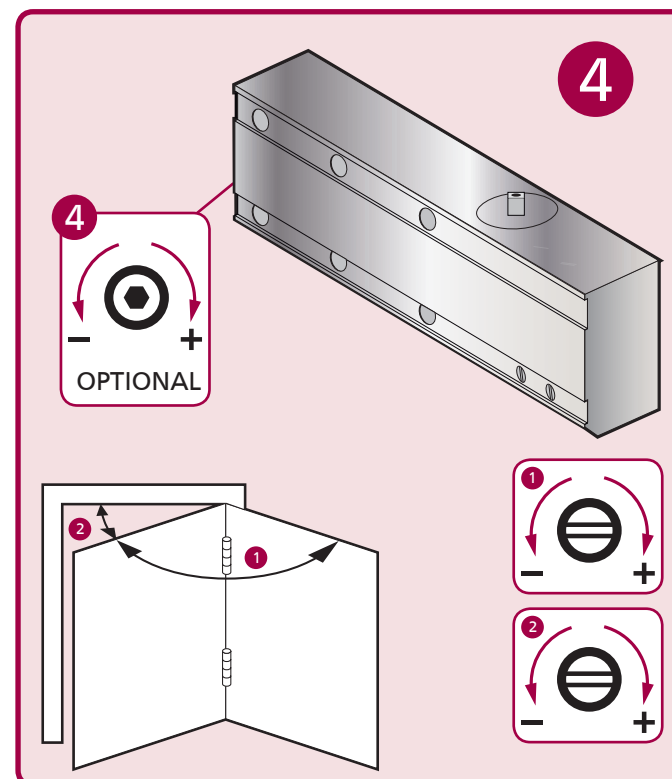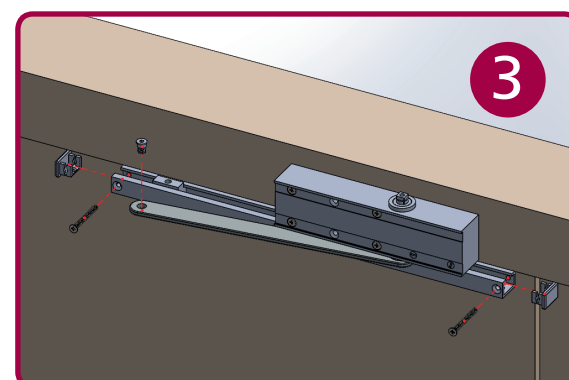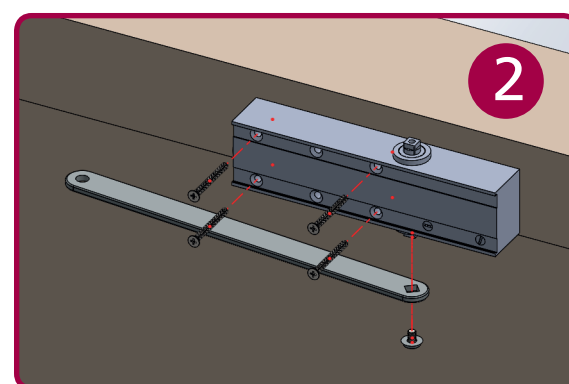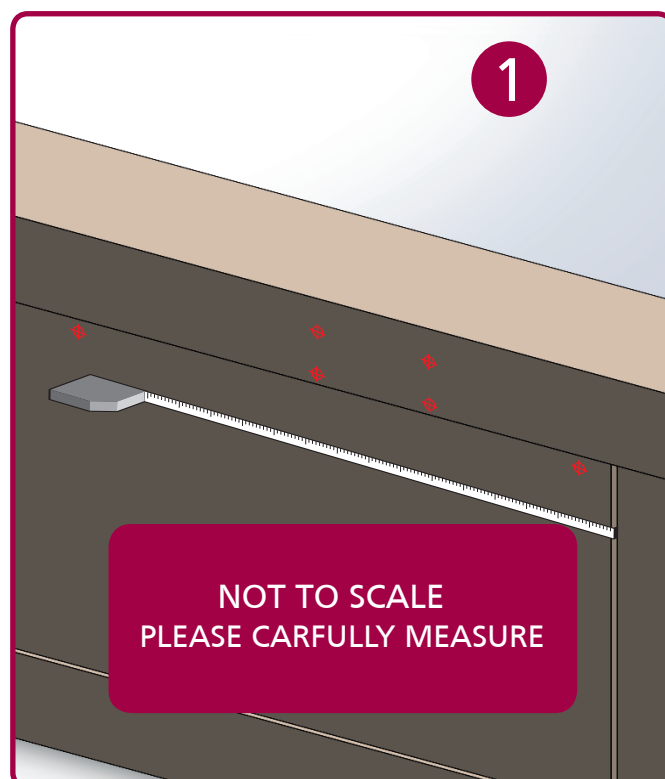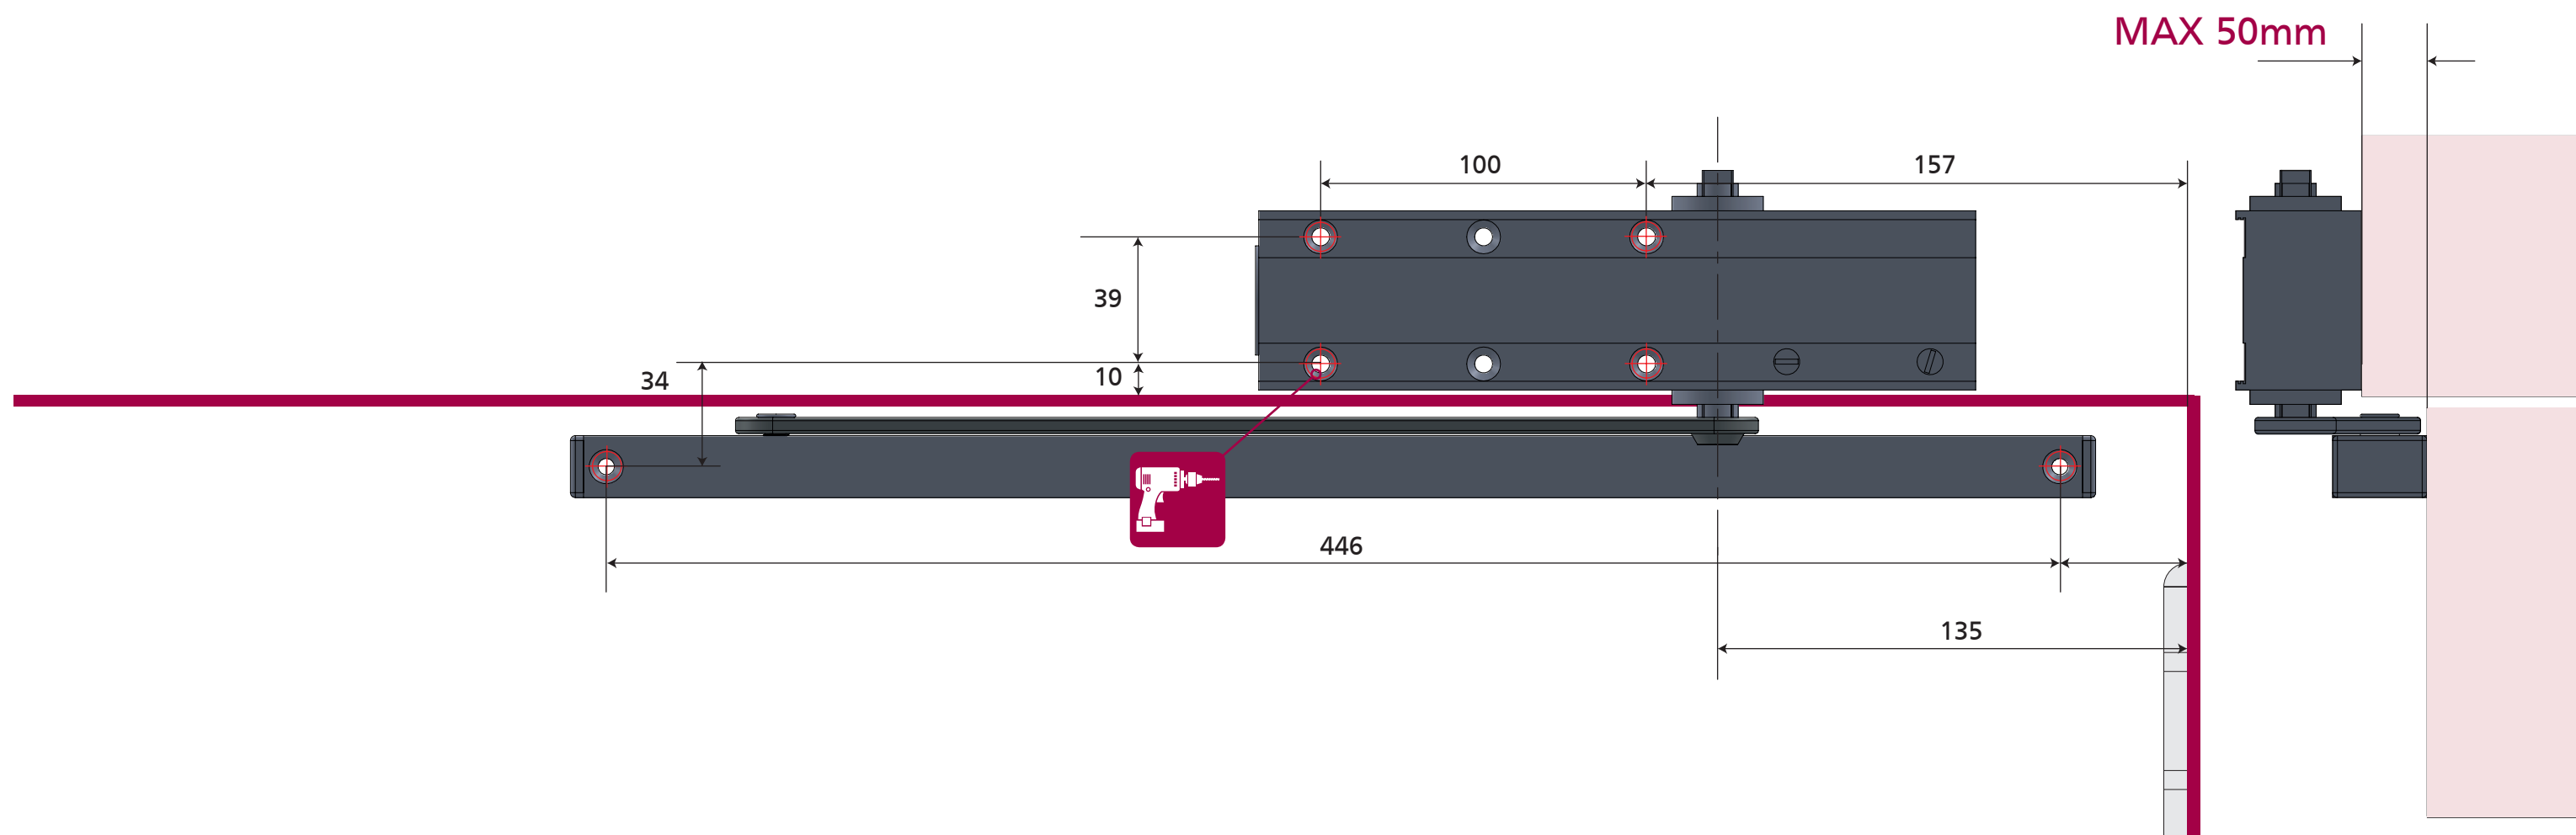

| 2-4 Power Adjustment |      |                 |                    |            |
|----------------------|------|-----------------|--------------------|------------|
| No. of turns         | Size | Max. door width | Max. opening angle | Max weight |
| -4                   | 2"   | 850mm           | 180°               | 45         |
| *0                   | 3    | 950mm           | 180°               | 60         |
| + 6                  | 4    | 1100mm          | 120°               | 80         |

\* FACTORY PRE-SET  
■ NOT SUITABLE FOR FIRE DOORS

THE PINION BOLT MUST BE TIGHTENED TO 12NM

NO PART OF THIS INSTRUCTION CAN BE COPIED OR STORED IN ANY WAY OR FORM MANUALLY OR ELECTRONICALLY WITHOUT THE FULL PERMISSION OF RUTLAND

COPYRIGHT 2025 ©  
Last revision: Aug 2025



# Slide Arm Closer - Transom TS24

TEL: +44 (0) 1246 261 491 | [www.rutlanduk.co.uk](http://www.rutlanduk.co.uk)



Operations and  
Maintenance Manual



1812








1720



6156

BS EN 1154

4 8 2 1 1 3

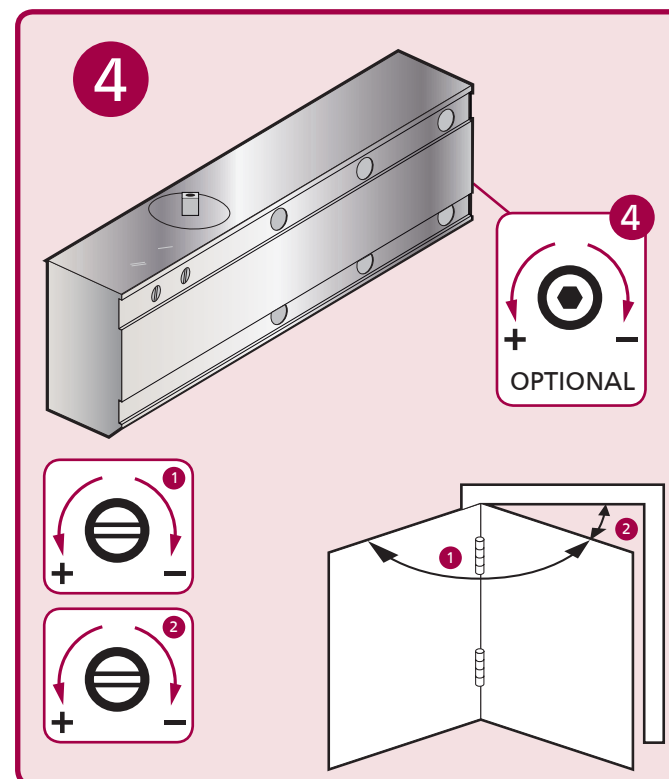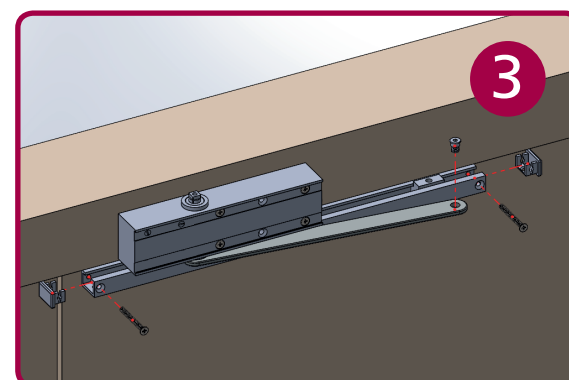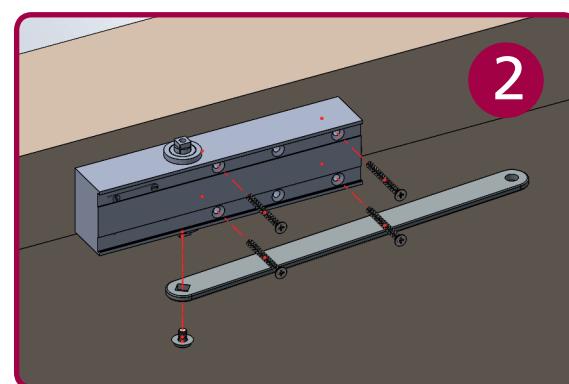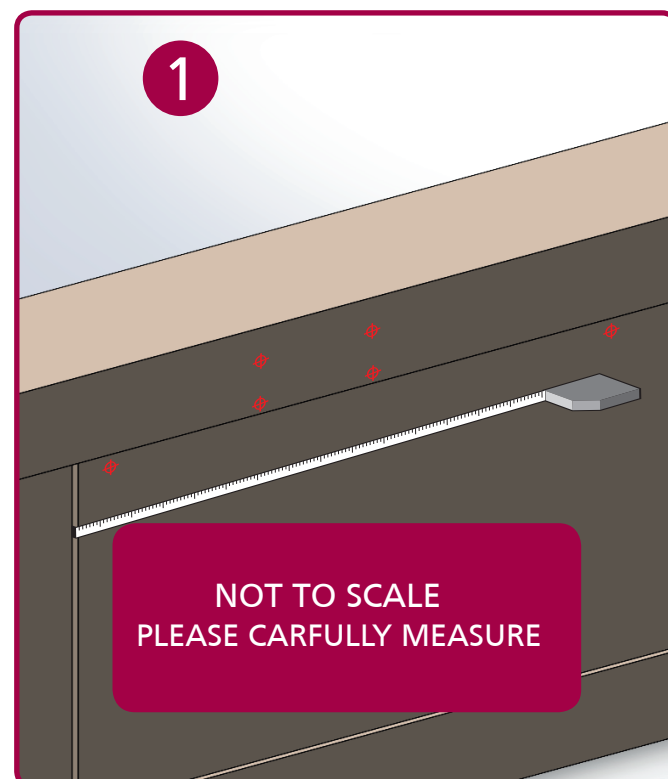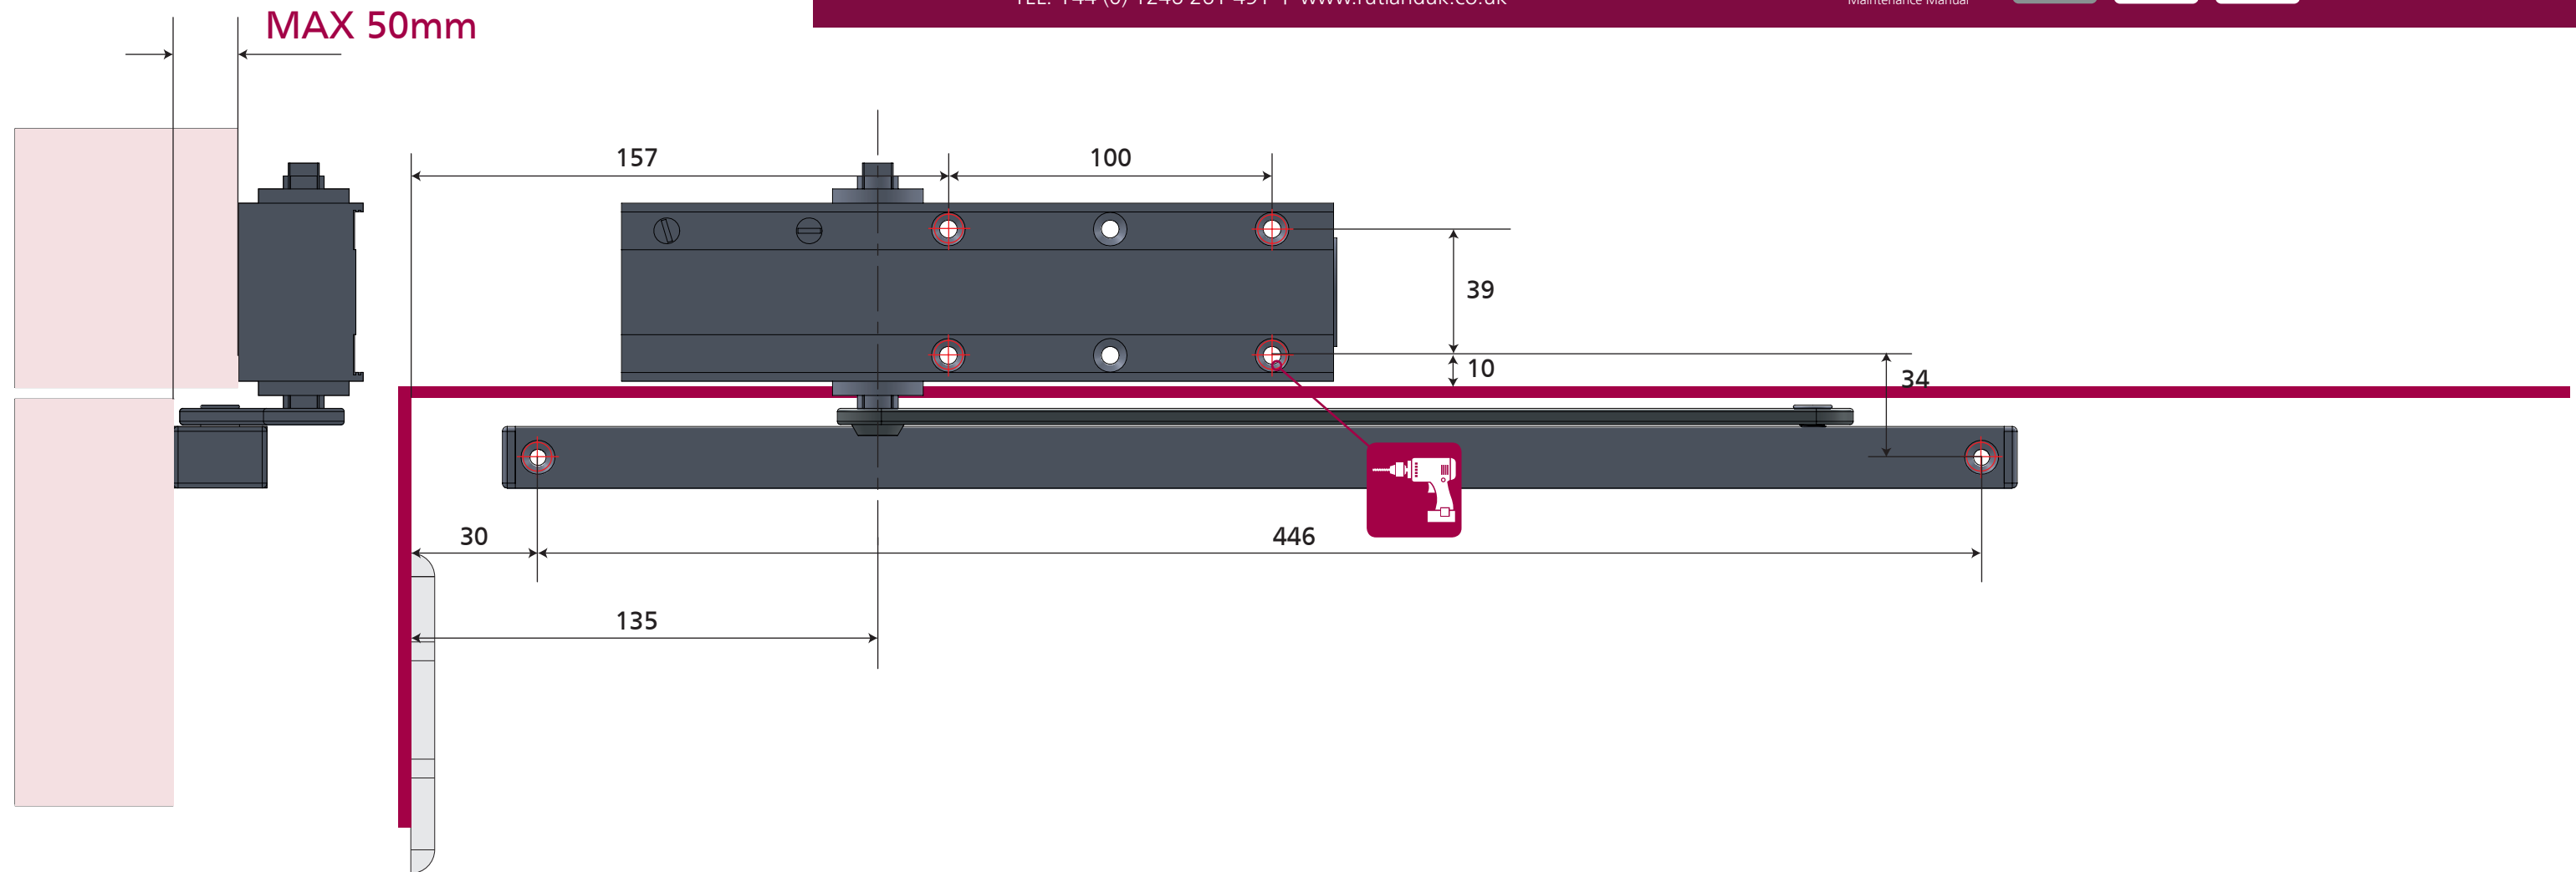

| 2-4 Power Adjustment                               |      |                 |                    |            |
|----------------------------------------------------|------|-----------------|--------------------|------------|
|                                                    |      |                 |                    |            |
| No. of turns                                       | Size | Max. door width | Max. opening angle | Max weight |
| -4                                                 | 2    | 850mm           | 180°               | 45         |
| *0                                                 | 3    | 950mm           | 180°               | 60         |
| + 6                                                | 4    | 1100mm          | 120°               | 80         |
| * FACTORY PRE-SET<br>■ NOT SUITABLE FOR FIRE DOORS |      |                 |                    |            |

THE PINION BOLT MUST BE TIGHTENED TO 12NM

NO PART OF THIS INSTRUCTION CAN BE COPIED OR STORED IN ANY WAY OR FORM MANUALLY OR ELECTRONICALLY WITHOUT THE FULL PERMISSION OF RUTLAND

COPYRIGHT 2025 ©  
Last revision: Aug 2025