



Slide Arm Closer - Pull side TS24

TEL: +44 (0) 1246 261 491 | www.rutlanduk.co.uk



Operations and
Maintenance Manual



10
YEARS
WARRANTY



1100mm
Max door width



80Kg
Max door weight








BS EN 1154

4 8 2 1 1 3



1812 1720 6156

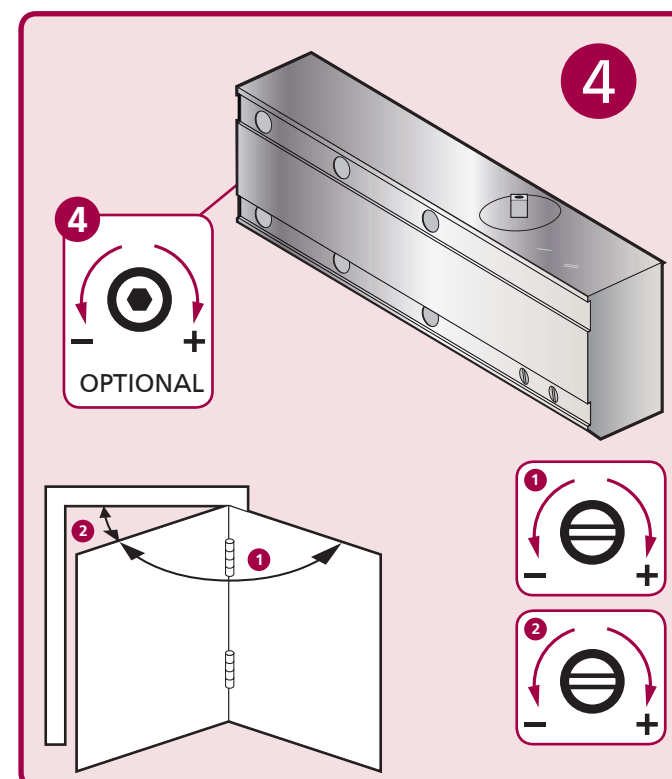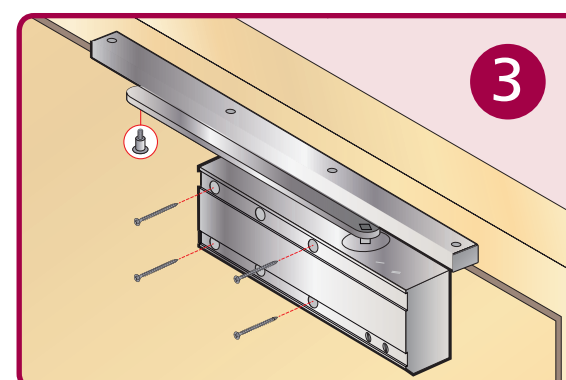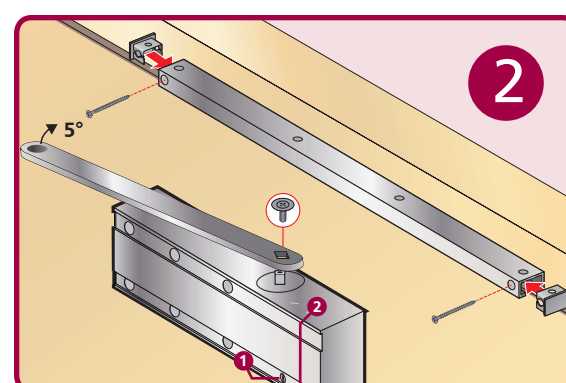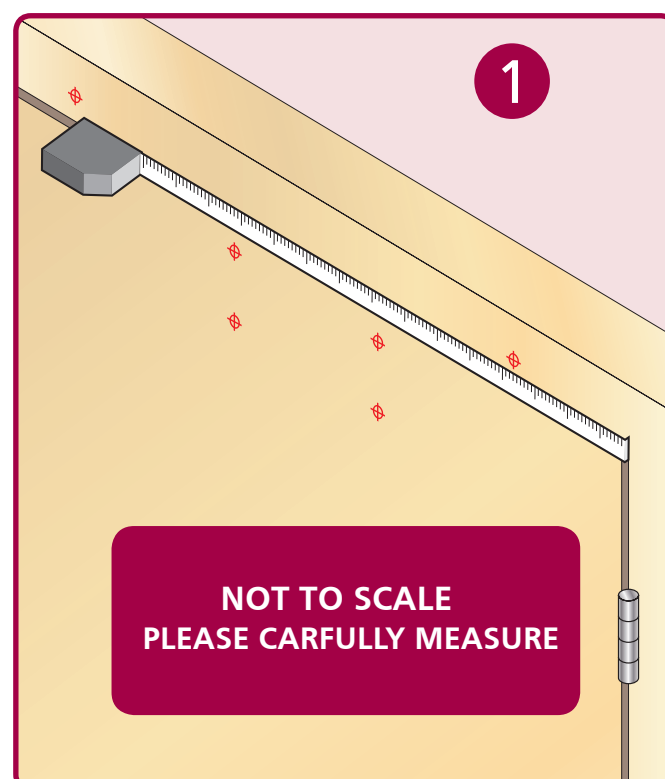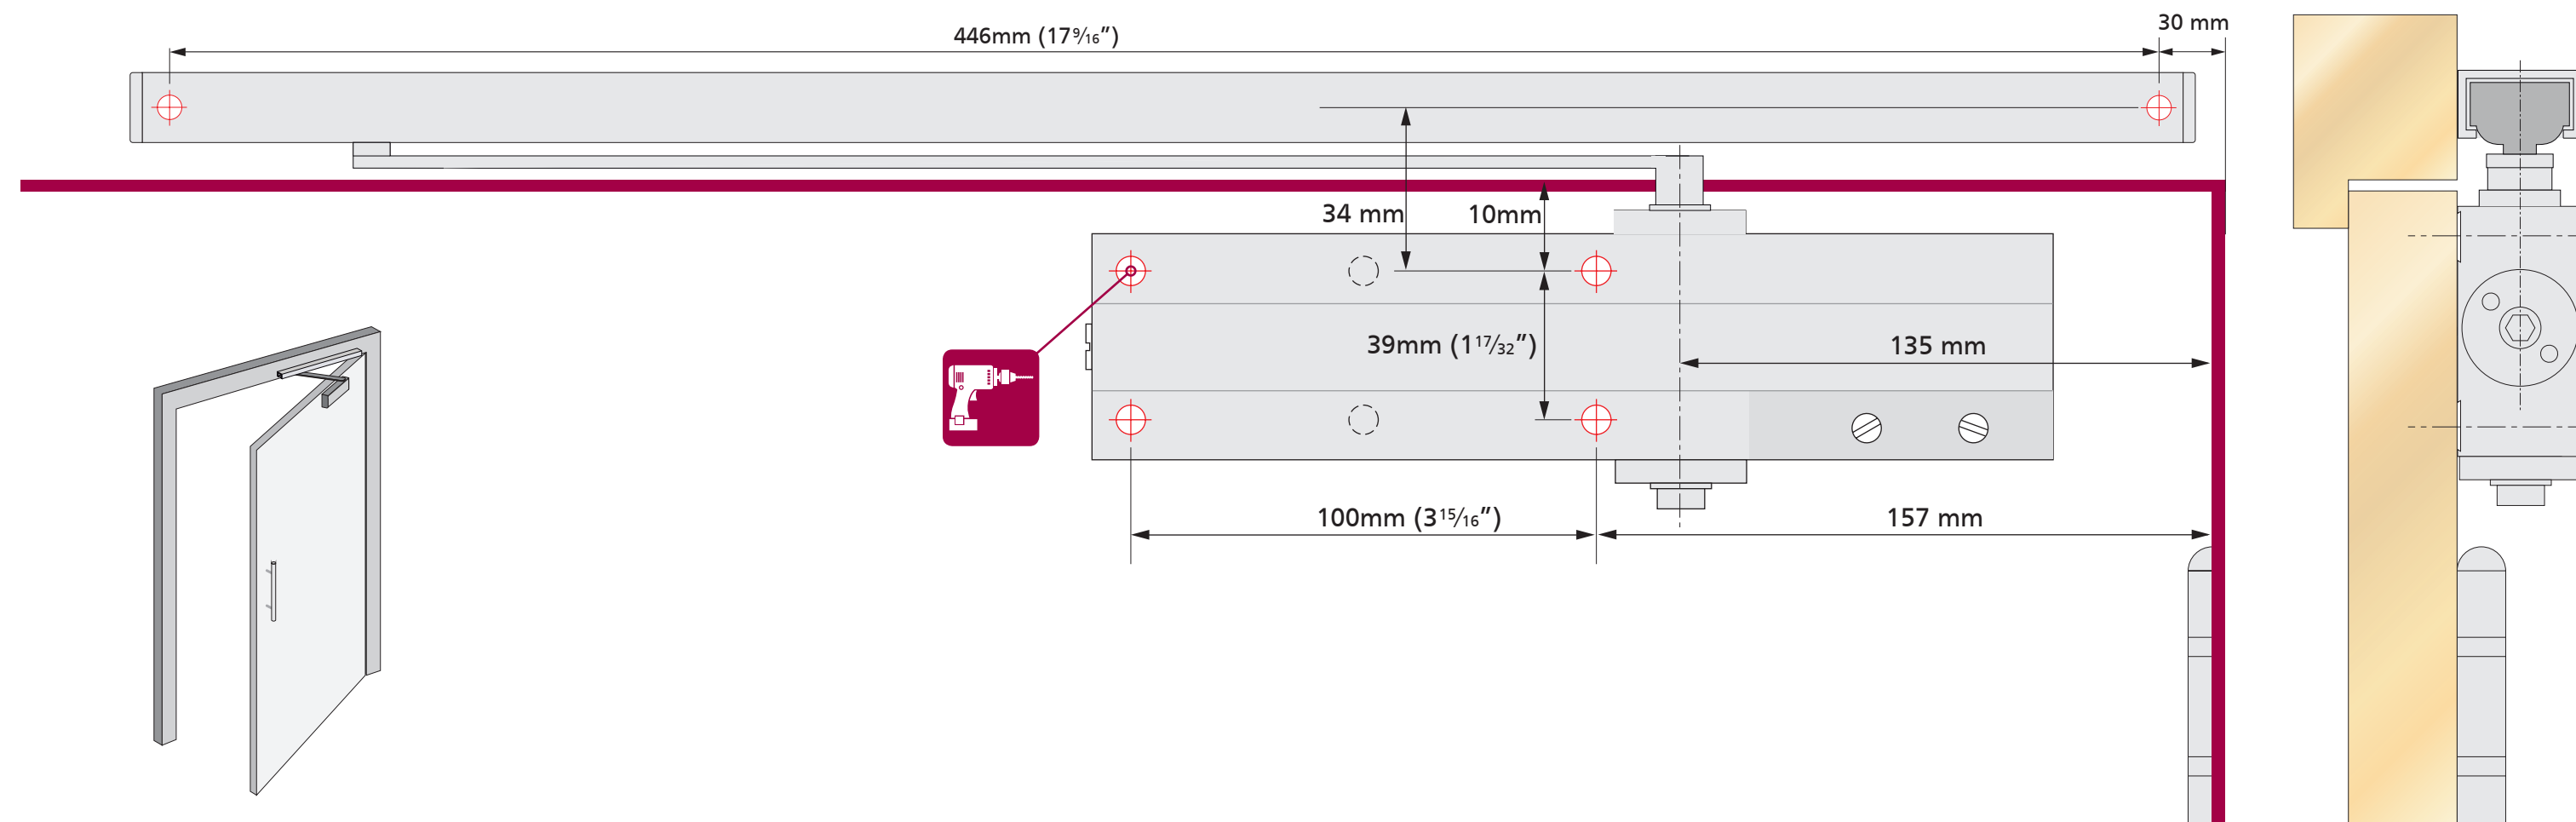

2-4 Power Adjustment				
4 No. of turns	Size	Max. door width	Max. opening angle	Max weight
-4	2	850mm	180 °	45
*0	3	950mm	180 °	60
+6	4	1100mm	120 °	80
* FACTORY PRE-SET ■ NOT SUITABLE FOR FIRE DOORS				

THE PINION BOLT MUST BE TIGHTENED TO 12NM

NO PART OF THIS INSTRUCTION CAN BE COPIED OR STORED IN ANY WAY OR FORM MANUALLY OR ELECTRONICALLY WITHOUT THE FULL PERMISSION OF RUTLAND

COPYRIGHT 2025 ©
Last revision: Aug 2025



Slide Arm Closer - Pull side TS24

TEL: +44 (0) 1246 261 491 | www.rutlanduk.co.uk



Operations and
Maintenance Manual



10
YEARS
WARRANTY



1100mm
Max door width



80Kg
Max door weight








BS EN 1154



4 8 2 1 1 3



6156

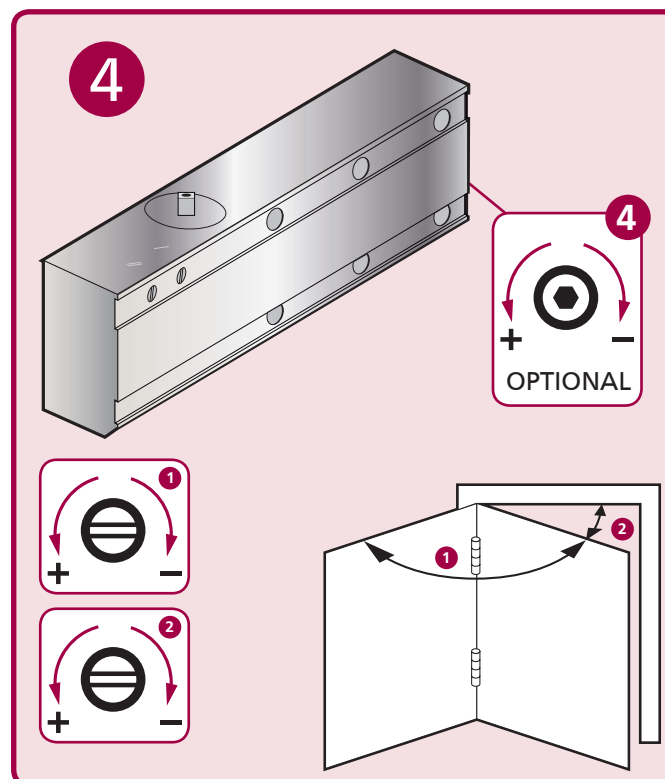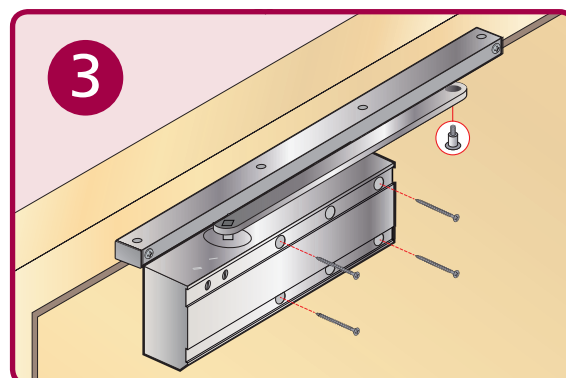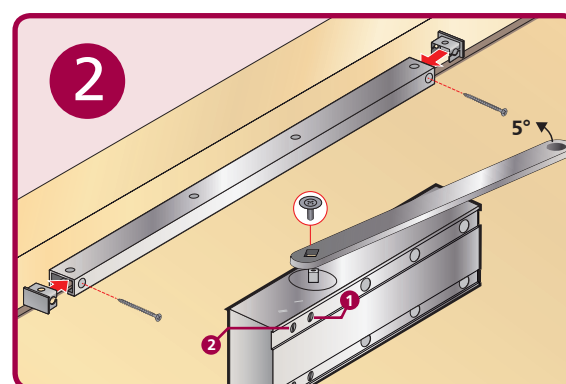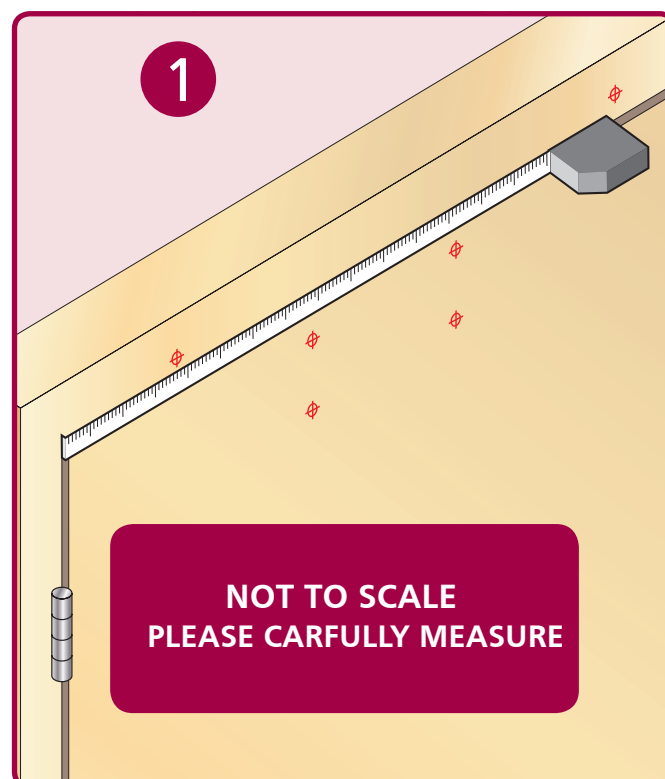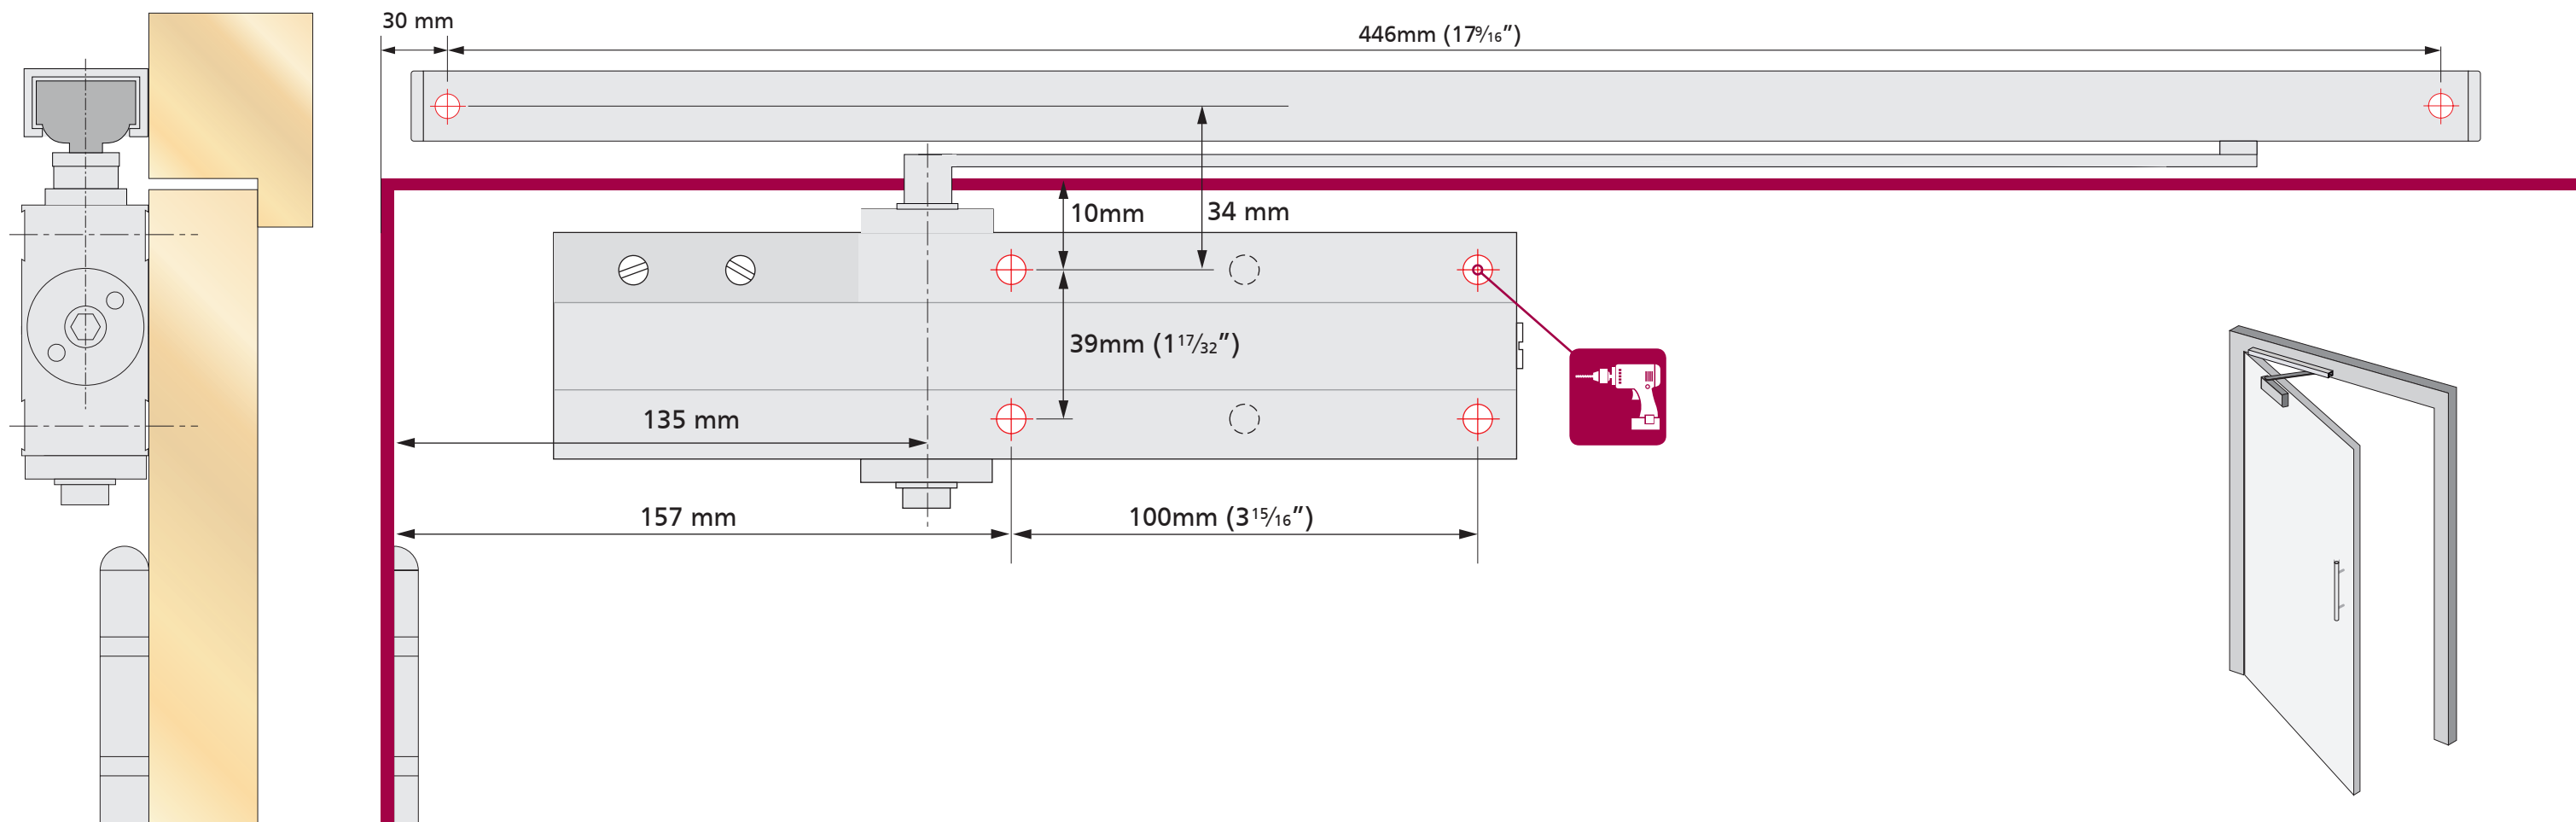

2-4 Power Adjustment				
4				
No. of turns	Size	Max. door width	Max. opening angle	Max weight
-4	2"	850mm	180 °	45
*0	3	950mm	180 °	60
+ 6	4	1100mm	120 °	80
* FACTORY PRE-SET ■ NOT SUITABLE FOR FIRE DOORS				

THE PINION BOLT MUST BE TIGHTENED TO 12NM
THE PINION BOLT MUST BE TIGHTENED TO 12NM

NO PART OF THIS INSTRUCTION CAN BE COPIED OR STORED IN ANY WAY OR FORM MANUALLY OR ELECTRONICALLY WITHOUT THE FULL PERMISSION OF RUTLAND

COPYRIGHT 2025 ©
Last revision: Aug 2025