



Multipoint Lock with Keeps & Intumescent kits


Fitting Instruction

TEL: +44 (0) 1246 261 491 | www.rutlanduk.co.uk



Operations and Maintenance Manual

Door Frame cutout dimension of Keeps for RMP3 multipoint lock

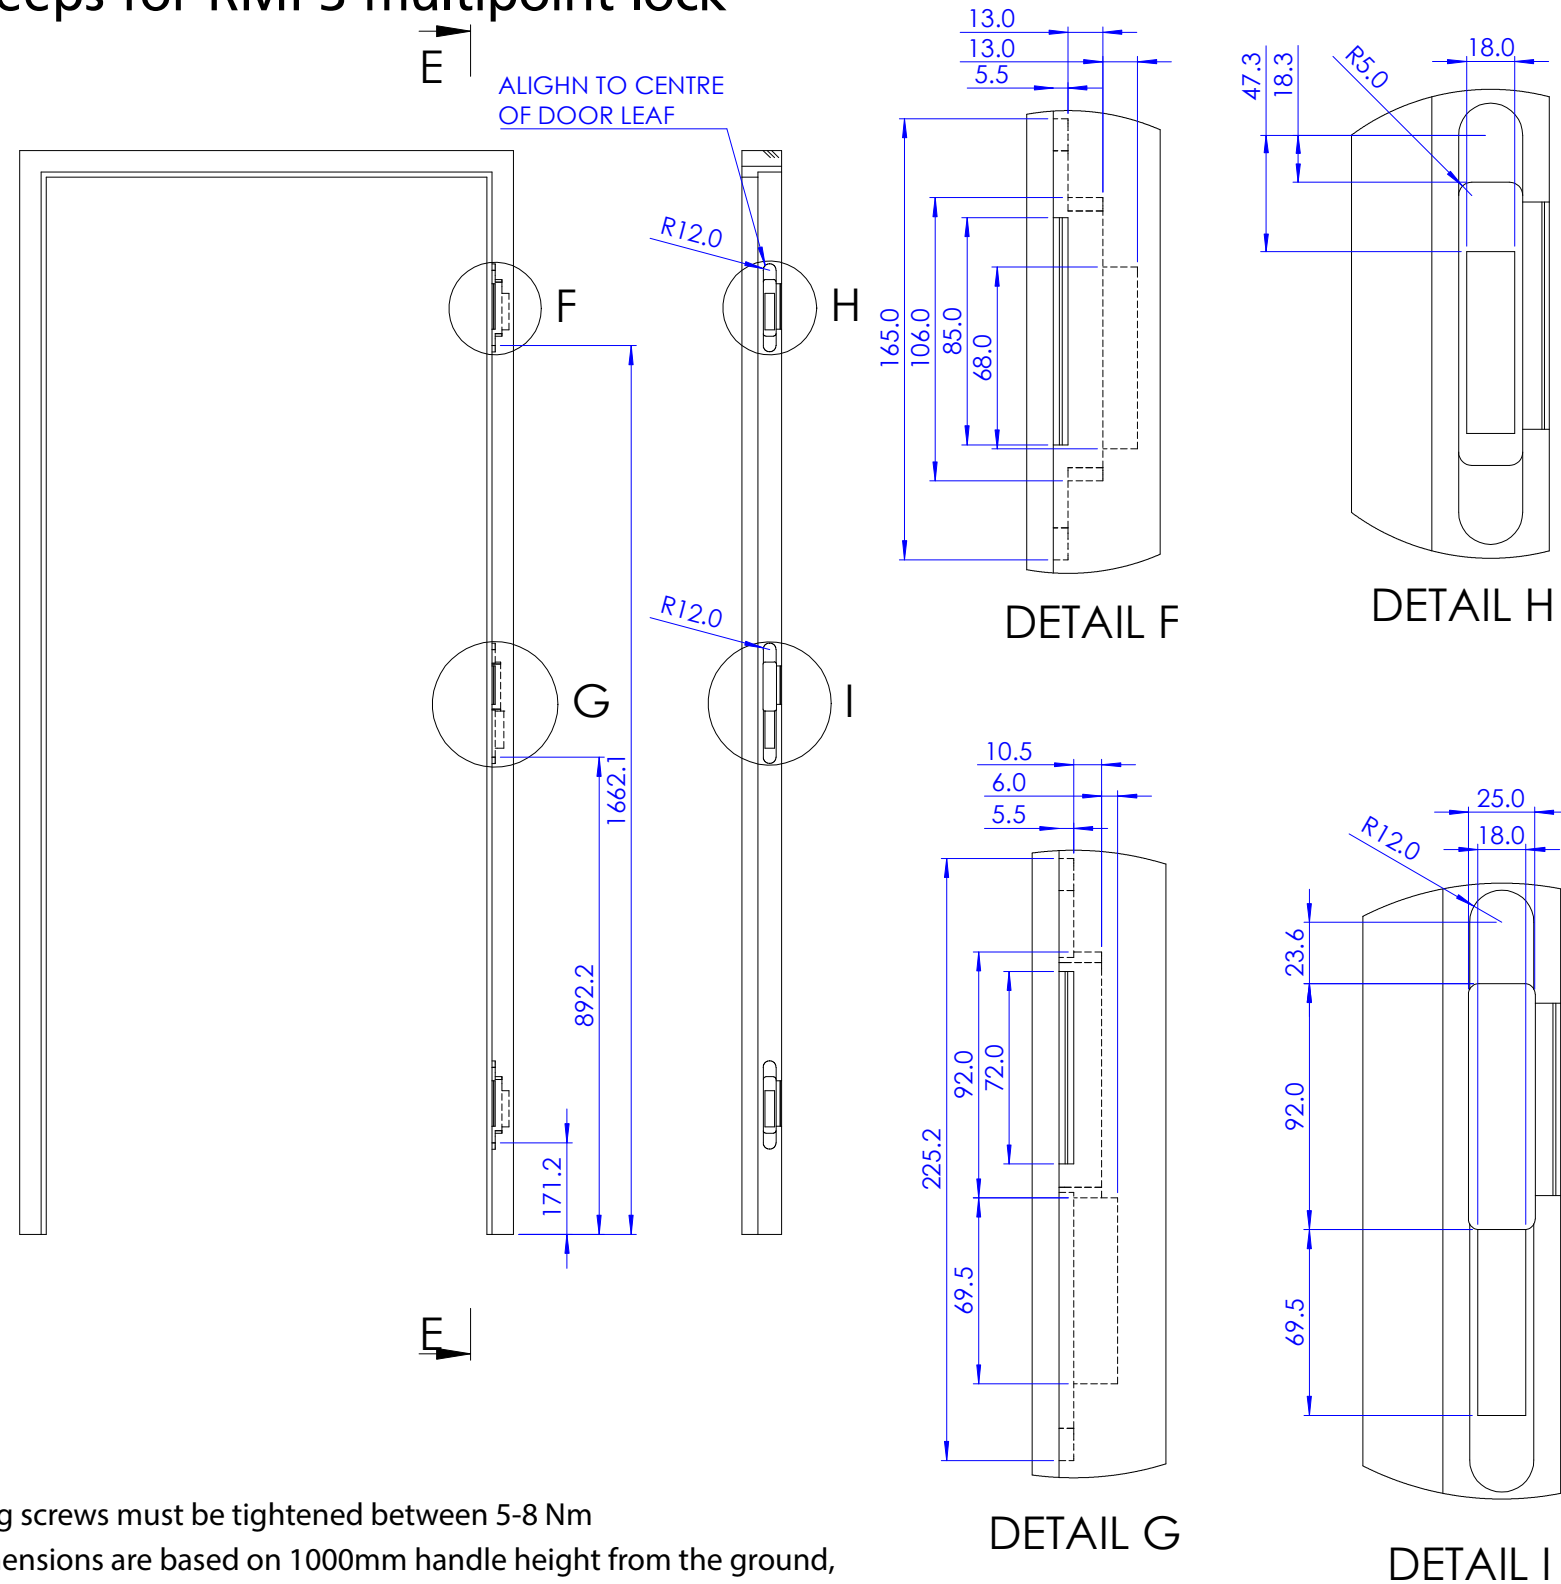

*Fixing screws must be tightened between 5-8 Nm

**Dimensions are based on 1000mm handle height from the ground, and should be adjusted up or down based on the application

Assembly view of RMP3. Multipoint Lock

