

Contents

1 x Light fitting including fixing bracket with side screws and lock washers
2 x Glass shades
1 x Fixing pack containing connection blocks, 2 wall plugs, 2 screws and shade attachment tool.

Safety First/Important!

This light fitting is suitable for indoor use only. It should not be fitted to newly painted or plastered surfaces as this may cause discolouration of the finish.
Please read the following carefully.

Important!

This light fitting must be connected to the earth supply. If your lighting circuit does not have an earth, ask a qualified electrician to provide an earth facility,

- ★ To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- ★ To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- ★ This fitting should be fitted to a lighting supply with protected 5 Amp fuse or equivalent circuit breaker.
- ★ Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

Before starting

Please read through these instructions before commencing work, and keep them for future reference.

Fixing instructions

Step 1

Make sure you have the following items which are required to install this light fitting:

- ❖ Small electrical screwdriver & crosshead screwdriver
- ❖ Insulating tape

Step 2

Warning!


Before commencing installation, isolate the circuit to be used by removing the fuse or circuit breaker at the consumer distribution unit.

Step 3

- ❖ Remove the existing light fitting.

Step 4

- ❖ Unscrew and remove the back-plate cover retaining screws and washers from the fitting.
- ❖ Remove the back-plate cover.
- ❖ Using the light fitting as a guide, mark the position of the fixing holes onto the wall surface adjacent to the supply wiring.

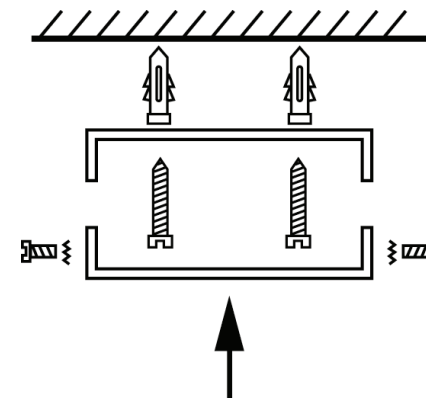


Step 5

- ❖ Drill holes at the positions marked and fit the plastic wall plugs supplied.
- ❖ Secure the light fitting to the wall surface using the screws supplied.

Step 6

- ❖ Using the connector block supplied, connect the wires in the following way:

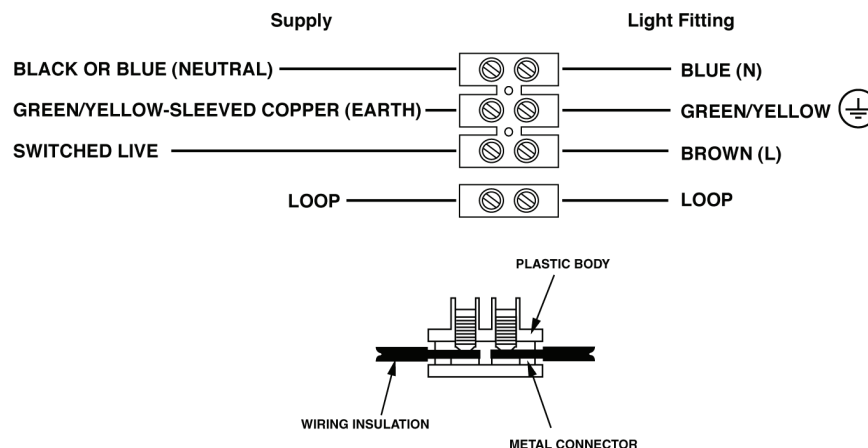

A fourth terminal is provided for loop in/out connections if required.

Check that.....

- ❖ You have correctly identified the house wires.
- ❖ The connections are tight.
- ❖ No loose strands have been left out of the connection block.

Step 7 – IMPORTANT!

Wrap two layers of electrical insulation tape around the loop connection block and around the wiring 2cm each side of the loop connection block.

Step 8


Secure the backplate cover onto the light fitting by replacing the retaining screws and washers.

Selecting the correct lightbulb

And attaching the shade.

- ❖ Maximum wattage - 3 Watts LED only.
- ❖ Lightbulb shape - capsule.
- ❖ Lightbulb cap shape – G9.

Do not exceed the maximum wattage or use a different shape of lightbulb. This may cause your light fitting to overheat.

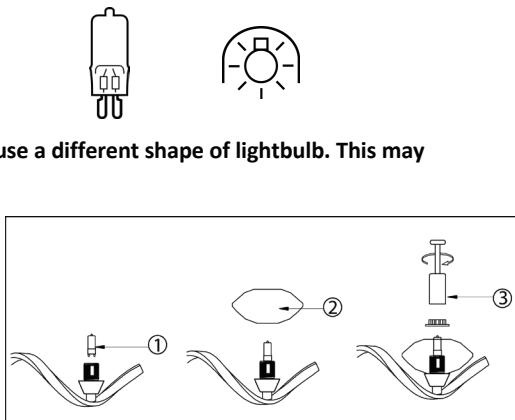

Switch on!

You may now switch the electricity back on. We are sure you will be pleased with your new light fitting.

Cleaning care

We recommend cleaning with a soft dry cloth.

Don't use abrasive materials as these may affect the finish.

Safety information

For your safety, please remember the following:

Always switch off the supply before changing lightbulbs or cleaning.

Allow bulbs to cool down before handling.



This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)

HELPLINE

If you receive this item with parts broken or missing, please telephone:

0333 0050070

Please have ready your name, address, tel. no., product reference, where purchased and parts required. An answering service is in operation outside office hours and during busy periods.

We regret that we are unable to give advice on internal house wiring.

BHS, Gorse Mill, Gorse Street, Oldham, OL9 9RJ

www.cascadehl.com/#contact

EU AUTHORISED REPRESENTATIVE: AUTHORISED REP COMPLIANCE
GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN, IRELAND
D02 P593

www.authorisedrepcompliance.com.



THE BRITISH HOME STORE



Bella Wall Light

Instructions

Thank you for selecting this light fitting. All products are thoughtfully designed and manufactured. To get the most from your new light please read these instructions fully. Some experience of electrical wiring and do-it-yourself is useful to install the product, however we do recommend that you use a qualified electrician to fit the light.

The light fitting should be installed in accordance with the UK building regulations, Part P and current IEE Wiring Regulations.