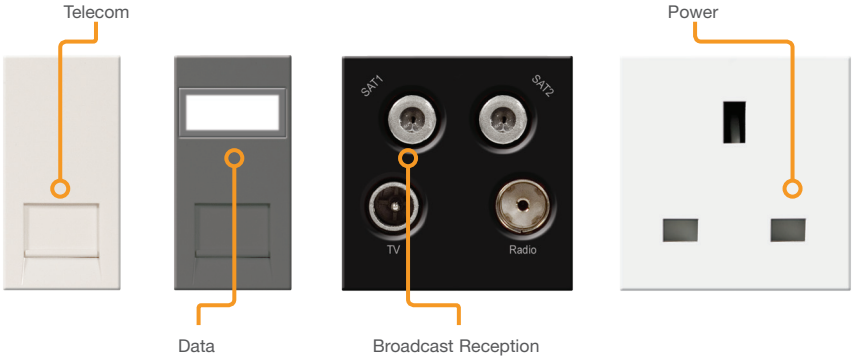


euro module
wiring accessories

A flexible range of plates and interchangeable modules,
available in varied finishes and profiles

Features & Finishes





Front Plates	3
TV/Radio/Sat	4
Blank Modules	4
Telephone & Data	5
Power Modules	5
Key Card Switch	6
HDMI Outlet	7
Outlet Modules	7
Combination Plate	7
Range Extension	8

Quick and easy to install



Step 1
Screw the plate to mounting box

Step 2
Wire the modules

Step 3
Click modules into place

Euro Module

Cat No.				Description	Inner Carton	Outer Carton
Front Plates - Nexus Moulded, Metal Clad, Brass Georgian & Brushed Steel						
Nexus Moulded	Metal Clad	Brass Georgian	Brushed Steel			
8EMS1	MC5EMS1	NBGEMS1	SBSEMS1	1 module - square	20	200
8EMS2	MC5EMS2	NBGEMS2	SBSEMS2	2 module - square	10	100
8EMR4	MC5EMR4	NBGEMR4	SBSEMR4	4 module - rectangular	10	100
8EM8	-	-	-	2 x Quad Euro Module, double stack plate	10	100

- Manufactured to BS 5733
- Earth terminal fitted to metal front plates
- Aperture Sizes: 1 Module = 25 x 50mm, 2 Module = 50 x 50mm, 4 Module = 100 x 50mm


8EMS1


NBGEMR4


MC5EMS1


SBSEMR4

Front Plates - Nexus Metal						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBSEMS1	NPCEMS1	NPBEMS1	NBNEMS1	1 module - square	20	200
NBSEMS2	NPCEMS2	NPBEMS2	NBNEMS2	2 module - square	10	100
NBSEMR4	NPCEMR4	NPBEMR4	NBNEMR4	4 module - rectangular	10	100


NBSEMS2


NPCEMR4


NPBEMS1

- Manufactured to BS 5733
- Fitted with earth terminal
- Aperture sizes: 1 Module = 25 x 50mm, 2 Module = 50 x 50mm, 4 Module = 100 x 50mm

Front Plates - Screwless Flatplate						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
FBSEMS1	FPCEMS1	FPBEMS1	FBNEMS1	1 module - square	20	200
FBSEMS2	FPCEMS2	FPBEMS2	FBNEMS2	2 module - square	10	100
FBSEMR4	FPCEMR4	FPBEMR4	FBNEMR4	4 module - rectangular	10	100

- Manufactured to BS 5733
- Fitted with earth terminal
- Aperture sizes: 1 Module = 25 x 50mm, 2 Module = 50 x 50mm, 4 Module = 100 x 50mm



FBSEMS2



FPCEMS2


FPBEMS1


FBNEMR4

Front Plates - Spring Hinged Cover			
SBSEMS2/FR	Brushed Steel 2 module - square	10	100
SBSEMR4/FR	Brushed Steel 4 module - rectangular	10	100


SBSEMS2/FR


SBSEMR4/FR

- Ideal for floor sockets

Euro Module

Cat No.			Size	Description	Inner Carton	Outer Carton
TV, Radio & Satellite Modules - Screened Outlets						
White	Grey	Black				
EMTVFW	EMTVFG	EMTVFB	1M	IEC - Female (Return)	10	100
EMTVMW	EMTVMG	EMTVMB	1M	IEC - Male	10	100
EMSATW	EMSATG	EMSATB	1M	Satellite - Female	10	100
EMTVSATW	EMTVSATG	EMTVSATB	2M	TV and Satellite - IEC Male + SAT-F Female	10	100
EMTVFMW	EMTVFMG	EMTVFMB	2M	TV and Radio - TV IEC Male + Radio IEC Female	10	100
EMTVFMSATW	EMTVFMSATG	EMTVFMSATB	2M	TV, Radio, Satellite - TV IEC Male + Radio IEC Female + SAT-F Female	10	100
EMTVFMSAT2W	EMTVFMSAT2G	EMTVFMSAT2B	2M	TV, Radio, Dual Satellite Module - TV IEC Male + Radio IEC Female + Dual SAT-F Female	10	100


EMTVFW


EMTVMG


EMSATB



EMTVFMSAT2B

- Manufactured to BS5733
- Aperture sizes: 1M = 25 x 50mm, 2M = 50 x 50mm

Module Description	Frequency Range (Mhz)	Insertion Loss (dB)
Technical Information - Screened Outlets		
1 gang TV Module - IEC Male/Female	0 - 862	0.5
2 gang TV & Satellite Module - IEC Male + SAT-F Female	TV - 5-68, 470-862, SAT - 950-2400	TV - 1.0, SAT - 2.0
3 gang TV, Radio & Satellite Module - TV IEC Male + Radio IEC Female + SAT-F Female	TV - 5-68, 470-862, Radio - 88-230 SAT - 950-2400	TV - 1.0, Radio - 1.0 SAT - 2.0
1 gang Satellite Module - SAT-F Female	0-2400	2.0
2 gang TV & Radio Module - TV IEC Male + Radio IEC Female	TV - 5-68, 470-862 Radio - 88-108	TV - 1.0, Radio - 1.0
4 gang TV, Radio & Dual Satellite Module - TV IEC Male + Radio IEC Female + Dual SAT-F Female	TV - 5-68, 470-862, Radio - 88-230 SAT1 - 950-2400, SAT2 - 0-2400	TV - 1.0, Radio - 1.0 SAT1 - 2.0, SAT2 - 2.0

Blank Modules						
EMBLKW	EMBLKG	EMBLKB	½ M (each)	Blank (2pcs)	10pks	100pks
-	-	EMBLK1W	1M	Blank (1pc)	-	-

EMBLKW


EMBLK1W

- Aperture sizes: ½M = 12.5 x 50mm

USB Charger Modules						
EMUSBW	EMUSBB	EMUSBG	2M	2.1A USB Charger - 1 port	-	-


EMUSBW


EMUSBB

- The USB charger is suitable for charging portable electronic devices via a USB 2.0 type A plug
- Total charger output current is 2.1A. This can be delivered from one socket or divided between the two as required and controlled by the devices being charged
- Manufactured to IEC 61558-2-16
- Terminal capacity 1 x 2.5mm² or 1 x 4.0mm²
- Minimum box depth 35mm
- Requires 2 module front plate (see page 24)

Euro Module

Cat No.			Size	Description	Inner Carton	Outer Carton
TV, Radio & Satellite Modules - Non-Screened Outlets						
White	Grey	Black				
EMNSTVW	EMNSTVG	EMNSTVB	1M	Co-ax Connection	10	100
EMNSITVW	EMNSITVG	EMNSITVB	1M	Co-ax (Isolated) Connection	10	100
EMNSSATW	EMNSSATG	EMNSSATB	1M	Satellite Connection - Female	10	100

- Manufactured to BS5733
- Aperture sizes: 1M = 25 x 50mm


EMNSTVW


EMNSSATW


EMNSSATG


EMNSITVB


EMNSSATB

Telecom & Data Modules						
EMBTMSW	EMBTMSG	EMBTMSB	1M	Telephone - BT Master (Screw)	10	100
EMBTMIW	EMBTMIG	EMBTMIB	1M	Telephone - BT Master (IDC)	10	100
EMBTSSW	EMBTSSG	EMBTSSB	1M	Telephone - BT Slave (Screw)	10	100
EMBTSIW	EMBTSIG	EMBTSIB	1M	Telephone - BT Slave (IDC)	10	100
EMRJ11W	EMRJ11G	EMRJ11B	1M	Telephone - RJ11 (Screw)	10	100
EMRJ45C5EW	EMRJ45C5EG	EMRJ45C5EB	1M	Data - RJ45, Cat5e (IDC)	10	100
EMRJ45C6W	EMRJ45C6G	EMRJ45C6B	1M	Data - RJ45, Cat6 (IDC)	10	100


EMBTMSW


EMRJ11G



EMRJ45C5EB

- Manufactured to BS 6312-2 where applicable
- Aperture sizes: 1M = 25 x 50mm

Power Modules						
EMUKSW	EMUKSG	EMUKSB	2M	13A (UK) Unswitched Socket	10	100
EMUNVW	EMUNVG	EMUNVB	2M	Universal Unswitched Socket	10	100
EMEUSW	EMEUSG	EMEUSB	2M	16A 2 Gang 2 Pin Unswitched Socket	10	100
EMSCHSW	EMSCHSG	EMSCHSB	2M	16A 1 Gang Schuko Unswitched Socket	10	100
EM2ASW	EM2ASG	EM2ASB	2M	2A Round Pin Unswitched Socket	10	100
EM5ASW	EM5ASG	EM5ASB	2M	5A Round Pin Unswitched Socket	10	100

- 13A UK socket manufactured to BS 1363-2
- Aperture sizes: 1M = 25 x 50mm, 2M = 50 x 50mm


EMUKSW


EMSCHSG



EMUNVB


EMEUSW

Euro Module

16 Amp Hotel Key Card Switch

Cat No. White	Cat No. Grey	Cat No. Black	Size	Description	Inner Carton	Outer Carton
EMKYCSW	EMKYCSG	EMKYCSB	2M	16 amp key card switch	10	100




EMKYCSG

- 50 x 50mm Euro Module
- Load Rating -
  1800W for resistive
  800W for inductive
- 30 second power-off delay
- Locator LED
- Mounting box depth 47mm
- Colour coded terminals with backed-out and captive screws
- Designed and manufactured to BS EN 60669-2-1

Key Controlled Switched Socket

EMKYSWSW	EMKYSWSG	EMKYSWSB	4M	13 Amp double pole key controlled switched socket	10	100



EMKYSWSW

- Manufactured to BS 1363-2, BS EN 60669-1
- Mounting box depth 47mm
- Termincal capacity 3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm²
- Lockable socket, supplied with two keys
- Double Pole switch

Switch Modules

EMSW12W	EMSW12G	EMSW12B	1M	20AX 2 Way Switch	10	100
EMSW13W	EMSW13G	EMSW13B	1M	10AX Intermediate Switch	10	100
EMSW12KYW	EMSW12KYG	EMSW12KYB	1M	20AX 2 Way Key Switch	10	100
EMSW12ELW	EMSW12ELG	EMSW12ELB	1M	20AX 2 Way Key Switch - Emergency lighting test	10	100
EMSW30KYW	EMSW30KYG	EMSW30KYB	1M	20A DP Key Switch	10	100
EMSW30W	EMSW30G	EMSW30B	1M	20A DP Switch	10	100



EMSW13W



EMSW12ELW



EMSW12KYB

- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 25mm

Fused Module

EMFUSEW	EMFUSEG	EMFUSEB	1M	13A Fused Module	10	100



EMFUSEW

Fused Oulets

- Manufactured to BS 1363 Part 4
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Minimum mounting box depth 25mm
- Clearly marked terminals with backed out captive screws for easy installation

Euro Module

Cat No.			Size	Description	Inner Carton	Outer Carton
RCA x 2 Outlet						
White	Grey	Black				
EMRCA2W	EMRCA2G	EMRCA2B	1M	RCA x 2 outlet	10	100


EMRCA2W


EMRCA2G


EMRCA2B

- Manufactured to BS 5733
- RCA/phono x 2 outlet
- Screw terminals

Flex Outlets				
EMFO	2M	Brush flex outlet	10	100
EM45AFO	2M	45 amp flex outlet	10	100


EMFO


EM45AFO

Brush flex outlet
- Neat and tidy cable outlet
- Ideal for cavity walls

45 amp flex outlet
- M20 cable gland, supplied with 3 way terminal black


HDMI Outlet						
EMHDMIW	EMHDMIG	EMHDMIB	2M	HDMI outlet	10	100


EMHDMIG


EMHDMIB

- Manufactured to BS 5733
- Female HDMI outlet, and rear
- 90˚ connection to help with limited space in wall void
- Suitable for high speed, 3D ready 1.4 HDMI cables

Combination Plate			
822EM4	1 x 2g Socket + 1 x 4 Module Aperture - Nexus Moulded	1	5
8222EM8	2 x 2g Socket + 2 x 4 Module Aperture - Nexus Moulded	1	5
NBS222EM8G	2 x 2g Socket + 2 x 4 Module Aperture - Nexus Metal, Brushed steel	1	5
NPC222EM8W	2 x 2g Socket + 2 x 4 Module Aperture - Nexus Chrome	1	5


NBS222GEM8

- Twin earth fitted as standard to allow a double earth facility for installations requiring
- High integrity protective connection Ref. BS 7671:2008
- Manufactured to BS 1363 Part 2
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Mounting box depth 47mm (HGS07/(04)
- Modules of mains and extra low voltage rating must not be fitted to the same front plate aperture Ref. BS 7671:2008

Euro Module

Euro Module - Range Extension

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.

- Select the desired combination of front plate and module(s)
- Simple installation, wire the module through the front plate aperture then click the module into place
- Modules of mains and extra low voltage rating must not be fitted to the same front plate aperture Ref. BS 7671:2008

Front Plate



NPCEMR4

+

Module(s)



EMTVFMSAT2W



EMNSSATW



EMBTMSW

=

Finish



Notes:

Notes:

Notes:

Head Office
Email:info@luceco.com

Luceco Ltd
Caparo House,
103 Baker Street, London,
United Kingdom, W1U 6LN

UK:
Tel: +44 (0) 1952 238 100
Fax: +44 (0) 1952 238 180
Email: sales@luceco.com

Nexus Industries Ltd
Nexus Distribution Centre
Stafford Park 1, Telford,
Shropshire, England, TF3 3BD

Germany:
Tel: +49 40 89066 8780
Fax: +49 40 89066 87829
Email: eu_sales@nexusinds.com

Nexus Industries GmbH
Holstenplatz 20b
22765 Hamburg, Germany

France:
Tel: +33 (0)7 88 29 56 59
Fax: +33 (0)1 5731 74 19
Email: fr_sales@nexusinds.com

Nexus Industries SAS
France & Belux
3 Rue de Courtalin
Magny Le Hongre 77700
FRANCE & BELUX

Italy:
Tel: +39 0434 1696795
Fax: +39 0434 1696795
Email: it_sales@nexusinds.com

Nexus Italia, Via Amman 10
33170 Pordenone, Italy

Spain:
Tel: +34 93 829 55 75
Email: sp_sales@nexusinds.com

Nexus Industries LTD
C/ Bobinadora 1-5
08302 Mataró
Barcelona (SPAIN)

Middle East:
Tel: +971 4 609 1867
Fax: +971 4 609 1868
Email: mea_sales@
nexusinds.com

Luceco Middle East FZE
Bldg. 5EB, Office 342,
PO Box 371128, DAFZA,
Dubai, UAE.

Asia Pacific:
Tel: +86 (0) 573 8357 0200
Fax: +86 (0) 573 8357 0248
Email: asia_sales@nexusinds.cn

No 1438, Jiachuang Road,
Xiuzhou Industrial Park, Jiaxing,
Zhejiang, China, P.C. 314031

North & South America:
Tel: +1 281 978 2509
Fax: +1 281 466 4620
Email: us_sales@luceco.com

Luceco Inc
11050 West Little York Road
Building C-2, Houston, Texas,
USA 77041

Africa:
Tel: +27 11 432 6779
Fax: +27 86 219 2099
Email: africa_sales@nexusinds.com

Unit 2, Cedar Wood Office Park
Cnr. Western Service and
Mount Lebanon Road Woodmead
South Africa, 2144

LUCECO

a Luceco Ltd. Group company

BRITISH BG GENERAL ROSS masterplug LUCECO

www.bgelectrical.uk