

Foxbridgesensor

IP20 2 in 1 Recessed/Surface Mount PIR Sensor

- High sensitivity optics for precise detection
- Versatile mounting - Recessed & Surface
- Easy to change Lux & Time delay settings via potentiometers on the front bezel
- Compact & flat lens design for seamless integration with ceilings




Surface Mount



Recessed Mount



Installation Height: 2.2m-4m

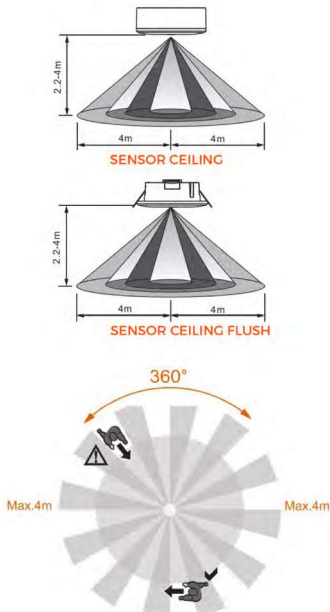

Detection Distance: Max. 8m

Cut Out Ø63-65mm (Recessed Mount)

5 Year Silver Warranty		
Code	Description	ØxD (mm)
70406	IP20 2 in 1 Recessed/Surface Mount PIR Sensor	93x35.5

Quality Assured
Product Warranty³
5 Year

Water & Dust
Protected
IP20

Sensing
PIR

Mounting
Options
Recessed/Surface

Technical Specification	
Construction	Polycarbonate Flame Retardant Body
Input Voltage	200-220 VAC
Frequency	50/60 Hz
Operating Temp	-20°C to +40°C
Load Capacity	LED 400W Halogen 800W
Time Delay	10s-7m
Lux Settings	<10 -2000lux
Protection Class	Class II
Compliance	EN 60669-2-1
Standard	LVD directive 2014/35/EU EMC directive 2014/30/EU

Note: BELL Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and BELL lighting may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, BELL Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.