



Skylineslim+

LED Floodlight

- 10/20/30/50W Genuine replacement for Halogen Floodlights
- 70/100/150/200W Genuine replacement for Metal Halide Floodlights
- Marine Grade Aluminium body
- Fully encapsulated IP65 TUV certified driver
- PIR Over-ride function
- Average 8M detection range for PIR Floods
- Separately tested IP65 PIR

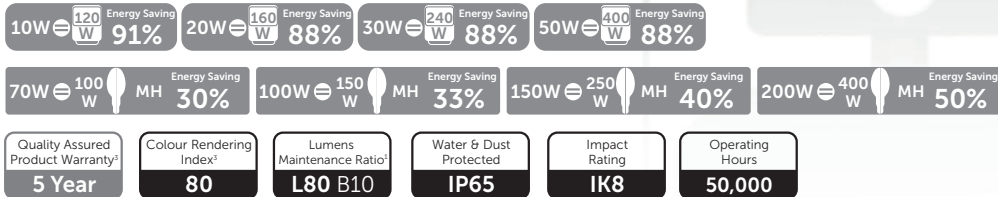

| Technical Specification | |
|-------------------------|--|
| Construction | Die Cast LM6 Marine Grade Aluminium body, Stainless Steel screws and fixings |
| Driver | BELL |
| LED Chip | Phillips |
| Input Voltage | 240V |
| Power Factor | > 0.9 |
| Operating Temp | -20°C - +25°C (Outdoor use only) |
| Standard | CE & UKCA |





5 Year Silver Warranty

| Code | W | Description | Lm | Temp | Lm/W | Weight | Windage | WxHxD (mm) |
|-------|-----|---------------------------|-------|-------|------|--------|---------------------|------------|
| 10980 | 10 | LED Floodlight | 1200 | 4000K | 120 | 0.3Kg | 0.009M ² | 112x134x31 |
| 10981 | 20 | LED Floodlight | 2400 | 4000K | 120 | 0.4Kg | 0.010M ² | 120x142x33 |
| 10982 | 30 | LED Floodlight | 3600 | 4000K | 120 | 0.5Kg | 0.014M ² | 136x158x34 |
| 10983 | 50 | LED Floodlight | 6000 | 4000K | 120 | 0.8Kg | 0.022M ² | 172x200x44 |
| 10984 | 70 | LED Floodlight | 8400 | 4000K | 120 | 1.1Kg | 0.043M ² | 229x259x48 |
| 10990 | 100 | LED Floodlight | 12000 | 4000K | 120 | 3.1Kg | 0.062M ² | 276x318x60 |
| 10991 | 150 | LED Floodlight | 18000 | 4000K | 120 | 3.8Kg | 0.080M ² | 300x357x60 |
| 10992 | 200 | LED Floodlight | 24000 | 4000K | 120 | 5.0Kg | 0.112M ² | 355x410x60 |
| 10985 | 10 | PIR LED Floodlight | 1200 | 4000K | 120 | 0.4Kg | 0.009M ² | 112x176x68 |
| 10986 | 20 | PIR LED Floodlight | 2400 | 4000K | 120 | 0.5Kg | 0.010M ² | 120x185x68 |
| 10987 | 30 | PIR LED Floodlight | 3600 | 4000K | 120 | 0.6Kg | 0.014M ² | 137x200x72 |
| 10988 | 50 | PIR LED Floodlight | 6000 | 4000K | 120 | 1.0Kg | 0.022M ² | 172x239x72 |
| 10989 | 70 | PIR LED Floodlight | 8400 | 4000K | 120 | 1.2Kg | 0.043M ² | 229x300x72 |
| 10995 | 50 | Asymmetric LED Floodlight | 6000 | 4000K | 120 | 0.8Kg | 0.044M ² | 194x231x48 |
| 10996 | 70 | Asymmetric LED Floodlight | 8400 | 4000K | 120 | 1.1Kg | 0.074M ² | 235x315x60 |
| 10977 | 100 | Asymmetric LED Floodlight | 11000 | 4000K | 110 | 3.2Kg | 0.062M ² | 277x315x60 |
| 10978 | 150 | Asymmetric LED Floodlight | 16500 | 4000K | 110 | 3.8Kg | 0.080M ² | 302x351x60 |
| 10979 | 200 | Asymmetric LED Floodlight | 22000 | 4000K | 110 | 5.0Kg | 0.112M ² | 352x408x60 |