


LED Wattage Switchable CCT Batten

- 3000K/4000K/6000K colour switchable
- 4 Wattage switchable
- UGR <19 & UGR <22 options available
- Apex Quick Fix universal accessories
- Multiple BESA box entry points suitable for through wiring with loop-in-loop-out terminals
- Suitable for educational institutions, healthcare facilities, commercial spaces, & storage facilities etc
- 36 in 1 fitting with plug-in emergency packs, Microwave and PIR on/off sensors available, along with a DALI-2 Dimming version
- Special high light transmission frosted polycarbonate diffuser for smooth uniform lighting with reduced glare
- Perfect for schools, universities & hospitals where a flexible Wattage and selectable colour batten is required
- The ideal replacement for Single/Twin Fluorescent T8 and T5 Fixtures
- Tool-free termination
- Shatterproof
- Suitable for surface mounting
- Flicker free driver



Quality Assured Product Warranty ³	On site Warranty ²	Colour Rendering Index ²	Lumens Maintenance Ratio ²	Water & Dust Protected	Impact Rating	Operating Hours	Efficiency Up To
8 Year	2 Year	80	L80 B10	IP44	IK08	70,000	140 Lm/W

Technical Specification	
Construction	Steel Body & Polycarbonate Diffuser
Driver	BELL
LED Chip	Samsung
Input Voltage	220–240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	-20°C to +35°C (Emergency version min temp 0°C)
Standard	CE & UKCA

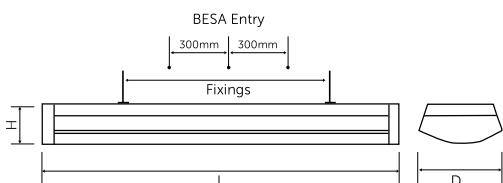



8 Year Gold Warranty

Code	W	Description	Lm	Temp	LxHxD Fixings (mm)
70440	12/16/20/24	Apex Mentor CCT UGR Wattage Switchable LED Batten (4ft)	1701-3328	3/4/6000K	1210x87x180 1050
70441	15/20/24/30	Apex Mentor CCT UGR Wattage Switchable LED Batten (5ft)	2135-4199	3/4/6000K	1510x87x180 1350
70442	20/26/32/38	Apex Mentor CCT UGR Wattage Switchable LED Batten (6ft)	2680-5282	3/4/6000K	1810x87x180 1650
70444	12/16/20/24	Apex Mentor CCT Wattage Switchable LED Batten (4ft)	1718-3361	3/4/6000K	1210x87x180 1050
70445	15/20/24/30	Apex Mentor CCT Wattage Switchable LED Batten (5ft)	2156-4241	3/4/6000K	1510x87x180 1350
70446	20/26/32/38	Apex Mentor CCT Wattage Switchable LED Batten (6ft)	2707-5335	3/4/6000K	1810x87x180 1650
70443	-	Apex Suspension System - 1.5m adjustable	-	-	-
10283	2.5	Apex Plug In 5 Year 2.5W Emergency Pack	-	-	-
10284V2	-	Apex Plug In Microwave Sensor with Dual On/Off & Corridor Dim Functionality	-	-	-
70451	-	Apex IR Remote Control for Plug In Microwave Sensor (10284V2)	-	-	-
70349	-	Apex Plug in PIR with Dual On/Off & Corridor Dim Functionality	-	-	-
15199	-	Apex IR Remote Control For Plug In PIR (70349)	-	-	-
15193	-	Apex Casambi Batten Mount PWM Corridor Dim PIR	-	-	-
Standard & Casambi PIR Max Operating Height 3.2m / Microwave Sensor Max Operating Height 5.0m					
Lumens based on 4000K					