


## Wattage and CCT Switchable LED Street Light

- C5-M marine grade treated construction suitable for coastal areas & harsh environments
- Sleek & sturdy die-cast aluminium construction street light with excellent heat dissipation for optimal performance
- Tilttable head 5°/10°/15° from horizontal allowing to achieve tailored light distribution as per site requirements
- 6m Pre-wired cable (30W/50W) or 10m Pre-wired cable (75W/100W/150W/200W)
- In-built 76mm & 60mm spigot suitable for both pole top & side entry installation
- Embedded breather valve, power off disconnecter, 10KV surge protection
- CCT switchable 3000K/4000K/5000K and power switchable
- Integrated spirit level for accurate installation
- Rear access for easy off-road maintenance
- Choice of 4 outputs in one luminaire
- 40mm Spigot available (optional)
- Auto isolation when opened



Quality Assured Product Warranty <sup>2</sup> <b>8 Year</b>	On site Warranty <sup>2</sup> <b>2 Year</b>	Colour Rendering Index <sup>2</sup> <b>80</b>	Lumens Maintenance Ratio <sup>2</sup> <b>L80 B10</b>	Water & Dust Protected <b>IP66</b>	Impact Rating <b>IK08</b>	Operating Hours <b>100,000</b>	Suitable For Site Lighting <b>110V</b>
--	--	--	---	---------------------------------------	------------------------------	-----------------------------------	---

Technical Specification	
Construction	Die Cast Marine Grade Aluminium, Polycarbonate lens
Driver	Sosen
LED Chip	Samsung
Input Voltage	110–240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	-20°C to +35°C
Standard	CE & UKCA

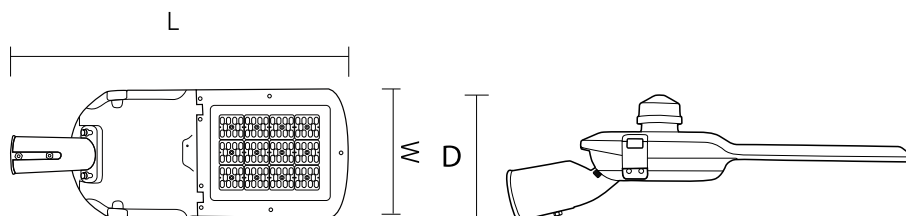



Dimension are for Post Top entry

### 8 Year Gold Warranty

Code	W	Description	Lm	Temp	Lm/W	Weight	Windage	WxDxL (mm)
72070	15/20/25/30	LED Street Light NEMA Socket,	2505-5130	3/4/5000K	145-183	5.12Kg	0.04M <sup>2</sup>	174x108x493
72071	20/30/40/50	LED Street Light NEMA Socket	3340-8550	3/4/5000K	145-183	5.12Kg	0.04M <sup>2</sup>	174x108x493
72072	30/45/60/75	LED Street Light NEMA Socket	5010-12825	3/4/5000K	145-183	7.4Kg	0.05M <sup>2</sup>	200x108x562
72073	70/80/90/100	LED Street Light NEMA Socket	11690-17100	3/4/5000K	145-183	8.1Kg	0.063M <sup>2</sup>	240x108x607
72074	105/120/135/150	LED Street Light NEMA Socket	17535-25650	3/4/5000K	145-183	8.75Kg	0.073M <sup>2</sup>	260x108x680
72075	140/160/180/200	LED Street Light NEMA Socket	23380-34200	3/4/5000K	145-183	10.2Kg	0.091M <sup>2</sup>	300x108x766
31139	-	Plug-in NEMA Photocell	-	-	-	-	-	-
72076	-	Ø40mm Spigot	-	-	-	-	-	-

Lumens based on 4000K