luceco
WIREDCONTROLS

8-WAY SWITCHING
Connection Box



MAIN FEATURES

- Non-dimmable control applications
- 8 luminaire outlets + 1 extra sensor outlet for sensor connection
- Luminaire outlet: Wieland type 6-pole/8-pole terminal base (L', N, E, Em)
- Sensor outlet: Wieland type 8-pole terminal base (L, N, E, L1', L2', P1, P2)
- Black housing and white housing available to choose from
- Freely switch between 1-channel (1 x 8) & 2-channel (2 x 4) control
- Tamper-proof structure design
- Rating of system: Max 16A; Rating of each output: Max 10A
- Flame-retardant material for safety protection


CAT NO.	DESCRIPTION
LPCHTKQCB1	White 8-way switching connection box

PRODUCT ACCESSORIES

CAT NO.	DESCRIPTION
LPCHTKHP13W5M	4-pole male white luminaire plug with 5m 3-core luminaire lead
LPCHTKHP14R5M	4-pole male red luminaire plug with 5m 4-core luminaire lead
LPCHTKHP41X1	8-pole male sensor plug with 3m 5-core sensor lead for switching LCM
LPCHTKHP42X2	8-pole male sensor plug with 2x 3m 5-core sensor leads for switching LCM

NOTE: Sensors supplied separately, see page 24

PRODUCT DRAWING

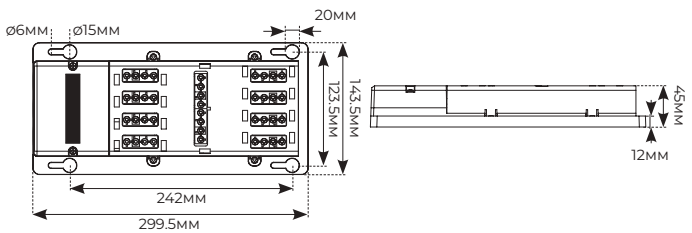

luceco
WIREDCONTROLS

8-WAY DIMMING
Connection Box



MAIN FEATURES

- Dimmable control applications (DALI-2 or 0/1-10V)
- 8 luminaire outlets + 1 extra sensor outlet for sensor connection
- Luminaire outlet: Wieland 6-pole terminal base (L' or L, N, E, Em, Dim+ Dim-)
- Sensor outlet: Wieland 8-pole terminal base (L, N, E, L', P1, P2, Dim-, Dim+)
- Black housing and white housing available to choose from
- Freely switch between 1-channel (1 x 8) & 2-channel (2 x 4) control
- Tamper-proof structure design
- Expandable: easy extension to another LPCHTKQCB3-01 via plug' n' play
- Rating of system: Max 16A; Rating of each output: Max 10A
- Flame-retardant material for safety protection

CAT NO.	DESCRIPTION
LPCHTKQCB3	White 8-way dimming connection box

PRODUCT ACCESSORIES

CAT NO.	DESCRIPTION
LPCHTKHP35W5M	6-pole male white luminaire plug with 5m 5-core luminaire lead
LPCHTKHP36R5M	6-pole male red luminaire plug with 5m 6-core luminaire lead
LPCHTKHP62X1	8-pole male sensor plug with 3m 5-core sensor leads for dimmable LCM

NOTE: Sensors supplied separately, see page 24

PRODUCT DRAWING

